TISVA®

FEEL THE WARMTH. SEE THE LIGHT.

An initiative of USHA INTERNATIONAL LTD.

ARCHITECTURAL LIGHTING 2023

SIZE : 11.5” X 11.5”



TISVA, inspired by the concepts of TVISA (light) and TATTVA (essence), brings alive the essence of light.

TISVA brings you a collection of aesthetic luminaires to indulge your emotions and play with light. Be it a designer corner at your home or your kids' room.

Choose light just as you like it. Modulate the brightness, adjust the colour and hue, from pure white to warm yellow, and for the adventurous, your choice of a vibrant spectrum of coloured light*.

Our designer home lights can be allied with your choice of lamp technology from our advanced LED LITESTIK range.

Designed with the highest quality, efficiency and concern for the environment, TISVA brings you the best in lighting.

SIZE : 11.5" X 11.5"

The Tisva Architectural Range is engineered for higher intensity, greater uniformity of light and seamless functionality. The range brings alive both the aesthetic and the functional aspect of architecture; interiors as well as exteriors. Technologically superior, these lights are long lasting and extremely reliable.

Ideal for accentuating elements, these high efficiency lights can be used in offices, hospitals, hotel lobbies and banks.

THE GAME CHANGERS!

INDEX

LED COB DOWNLIGHTERS ..... **Pg. 2**
LOW UGR
ORRIN
VEROS PRO
LEGEND PLUS
GVO
GALAXY PRO
JENO
LINOS
VENZA SERIES
RIO SF

RINGS & LED MODULE ..... **Pg. 28**
IVEK COB RINGS
IVEK PRO COB RINGS
IVEK TRIMLESS COB RINGS
EAGLE COB RINGS
GIMBAL COB RINGS
IVEK PRIME LED MODULE
EAGLE LED MODULE
EAGLE PRO LED MODULE

TRACK LIGHTING SYSTEM ..... **Pg. 42**
CALANTE PRO
AXIOS


LED PANELS ..... **Pg. 54**
VITO
VIVRE
EZIO RECESSED
EZIO SURFACE
VERTOS
2 X 2 PANEL

LED STRIPS ..... **Pg. 66**
LUME SERIES - INDOOR
LUME SERIES - OUTDOOR
LUME SERIES - RGBWW
LUME SERIES - ROPE LIGHT

LANDSCAPE ..... **Pg. 70**
WALL LIGHTS
BOLLARDS
POST TOP
GATE LIGHT

LIST OF PROJECTS ..... **Pg. 70**

SIZE : 11.5" X 11.5"

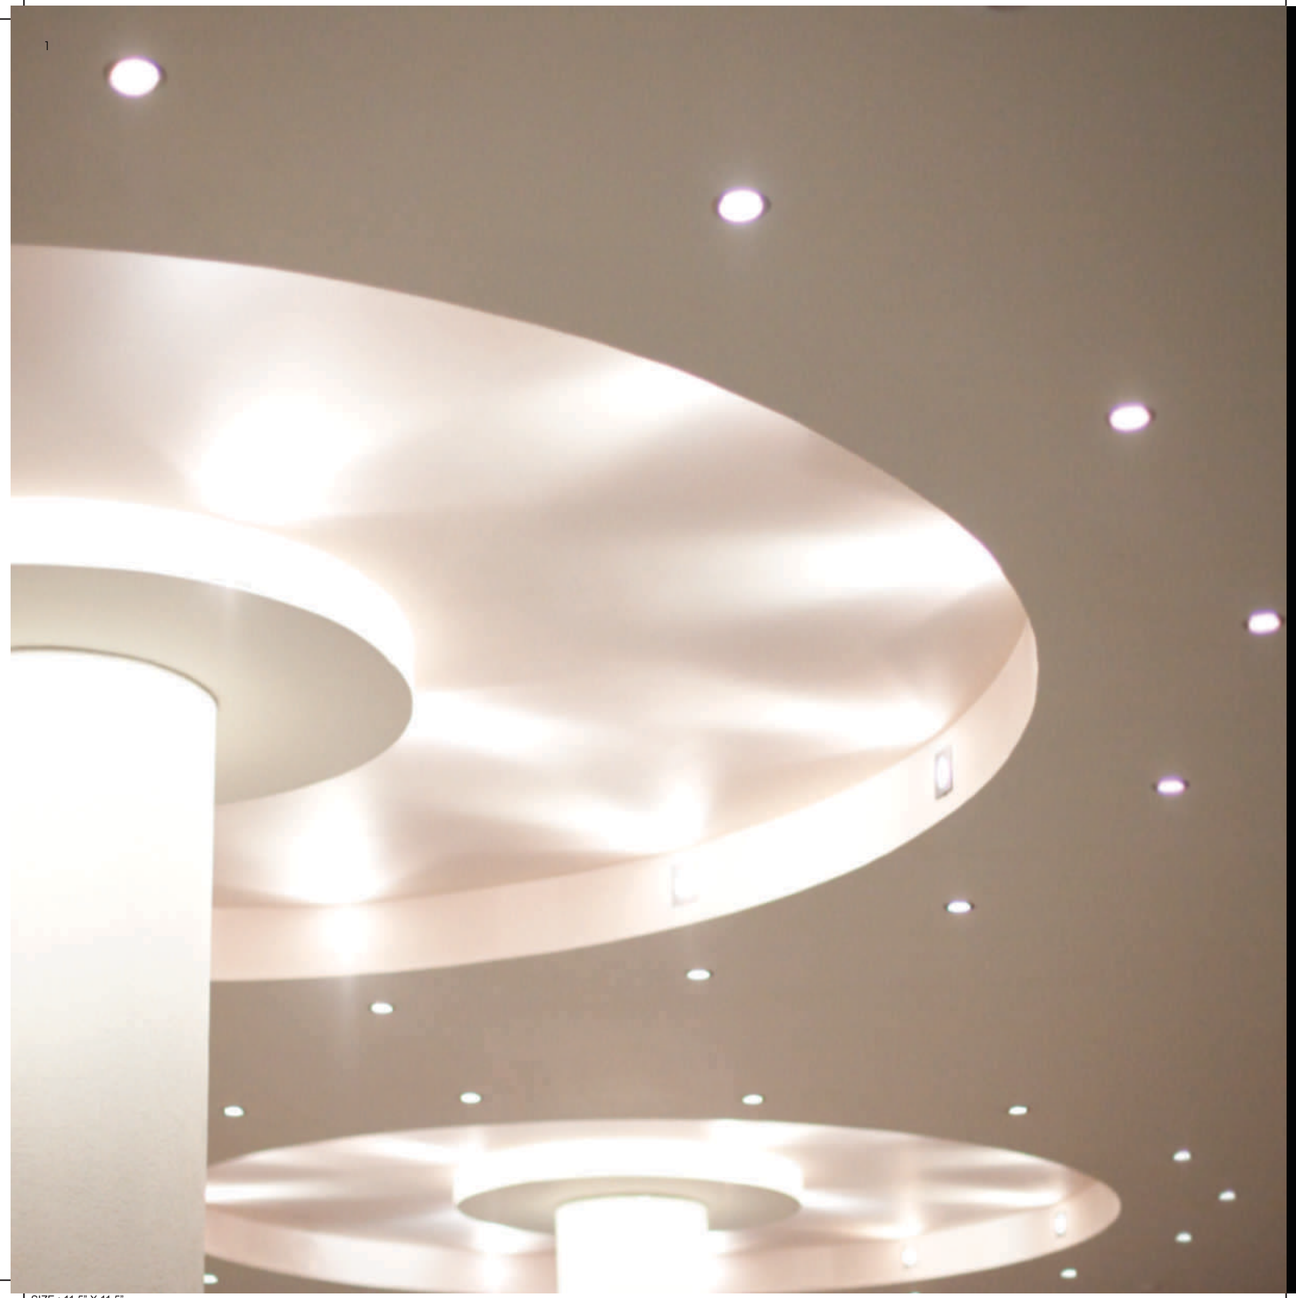

LED COB DOWNLIGHTERS

LOW UGR | ORRIN | LEGEND PLUS | VEROS PRO | GVO | GALAXY PRO | JENO | LINOS | VENZA SERIES | RIO SF

SIZE : 11.5" X 11.5"

UGR <10

DIE CAST ALUMINIUM HOUSING


SLEEK DESIGN

7.5W





13W











LOW UGR

DESCRIPTION

Recessed downlighter with superior eye comfort through better glare control. Compact, aesthetic and sleek design. Easy to mount on P.O.P ceilings

MATERIAL OF CONSTRUCTION

Die-cast aluminum housing with SS mounting clips

TECHNICAL INFORMATION

Wattage: 7.5W & 13W

UGR: ≤10, Ensures Practically No Glare.

CRI: ≥80, For Better Light Quality

SDCM: ≤3, Ensures Better Colour Consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP20,

Life: ≥30,000 Burning Hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

Available In Body Color Options Of Black And White.


APPLICATION AREA

Residences | Hotels | Modern Work Spaces | Showrooms


DOWNLIGHTER
SIGNATURE SERIES

LUMINOUS INTENSITY DISTRIBUTION CURVE


7.5W




13W



AVERAGE ILLUMINANCE AT A DISTANCE

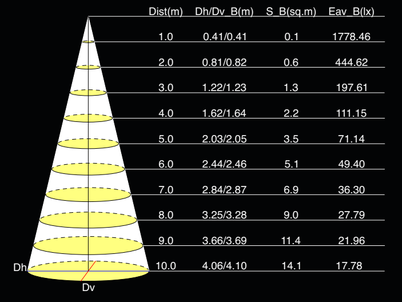

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.41/0.41	0.1	1778.46
2.0	0.81/0.82	0.6	444.62
3.0	1.22/1.23	1.3	197.61
4.0	1.62/1.64	2.2	111.15
5.0	2.03/2.05	3.5	71.14
6.0	2.44/2.46	5.1	49.40
7.0	2.84/2.87	6.9	36.30
8.0	3.25/3.28	9.0	27.79
9.0	3.66/3.69	11.4	21.96
10.0	4.06/4.10	14.1	17.78

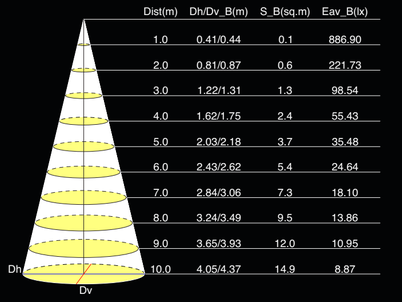

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.41/0.44	0.1	886.90
2.0	0.81/0.87	0.6	221.73
3.0	1.22/1.31	1.3	98.54
4.0	1.62/1.75	2.4	55.43
5.0	2.03/2.18	3.7	35.48
6.0	2.43/2.62	5.4	24.64
7.0	2.84/3.06	7.3	18.10
8.0	3.24/3.49	9.5	13.86
9.0	3.65/3.93	12.0	10.95
10.0	4.05/4.37	14.9	8.87

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	Beam Angle
DL08W3K12R	7.5W	3000K	A - Ø6.3 | C - 3.8 | B - 5.8	350	≥80	20	≥2.5	220-240V	32°
DL08W4K12R	7.5W	4000K	A - Ø6.3 | C - 3.8 | B - 5.8	365	≥80	20	≥2.5	220-240V	32°
DL13W3K12R	13W	3000K	A - Ø8.2 | C - 3.8 | B - 7.5	755	≥80	20	≥2.5	220-240V	32°
DL13W4K12R	13W	4000K	A - Ø5.0 | C - 3.8 | B - 7.5	790	≥80	20	≥2.5	220-240V	32°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

ORRIN

DIE CAST ALUMINIUM

FIXTURE COLOUR OPTION OF WHITE & BLACK

DEEP RECESSED


DIMMABLE OPTION in 7.5 W

TUNABLE OPTION IN 7.5W & 13W

3W








7.5W







ORRIN

DESCRIPTION

Deep recessed Downlighter with perfect balance of optimal light output and low glare.

Available in wide range of wattages to suit variety of applications

Dimmable and Tunable versions available for select models

Optimized heat sink design for better heat dissipation and performance

MATERIAL OF CONSTRUCTION

Die-cast powder coated aluminum Housing with ss mounting clips

TECHNICAL INFORMATION

Wattage: 3W, 7.5W, 13W & 20W

CRI: ≥80, For Better Light Quality

SDCM: ≤5, Ensures Colour Consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20

Life: ≥30,000 Burning Hours

Dimmability: Dimmable Versions Available For 7.5W. Please get in touch with Tisva Team for other Dimming Options

Available In Body Color Options Of Black And White.


APPLICATION AREA

Offices | Conference Halls | Hotels
Showrooms | Residences


LED COB DOWNLIGHTERS

LUMINOUS INTENSITY DISTRIBUTION CURVE


3W

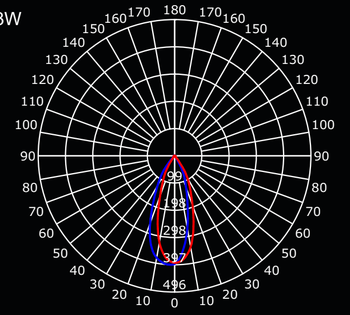


7.5W

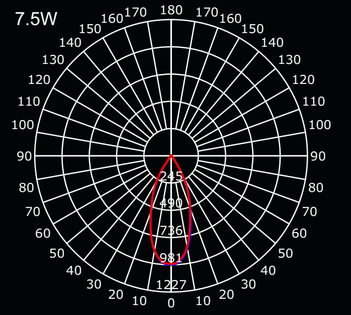

AVERAGE ILLUMINANCE AT A DISTANCE

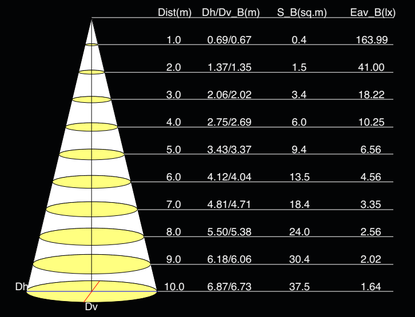

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.69/0.67	0.4	163.99
2.0	1.37/1.35	1.5	41.00
3.0	2.06/2.02	3.4	18.22
4.0	2.75/2.69	6.0	10.25
5.0	3.43/3.37	9.4	6.56
6.0	4.12/4.04	13.5	4.56
7.0	4.81/4.71	18.4	3.35
8.0	5.50/5.38	24.0	2.56
9.0	6.18/6.06	30.4	2.02
10.0	6.87/6.73	37.5	1.64

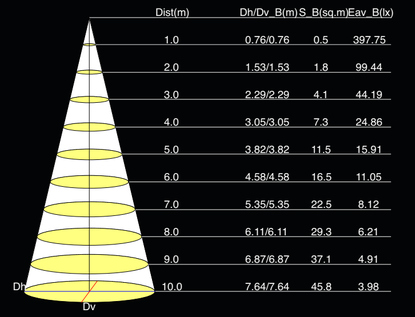

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.76/0.76	0.5	397.75
2.0	1.53/1.53	1.8	99.44
3.0	2.29/2.29	4.1	44.19
4.0	3.05/3.05	7.3	24.86
5.0	3.82/3.82	11.5	15.91
6.0	4.58/4.58	16.5	11.05
7.0	5.35/5.35	22.5	8.12
8.0	6.11/6.11	29.3	6.21
9.0	6.87/6.87	37.1	4.91
10.0	7.64/7.64	45.8	3.98

ITEM CODE	WATTAGE	CCT	COLOUR	DIMENSIONS (in cms)	LUMENS	DIMMABLE	TUNABLE	BEAM ANGLE
DL03211101	3 W	3000 K	WHITE	A - Ø4.0 | B - Ø3.5 | C - 3.5	250	NO	NO	34°
DL3436D11	3 W	4000 K	WHITE	A - Ø4.0 | B - Ø3.5 | C - 3.5	365	NO	NO	34°
DL03210902	3 W	3000 K	BLACK	A - Ø4.0 | B - Ø3.5 | C - 3.5	250	NO	NO	34°
DL75211106	7.5 W	3000 K	WHITE	A - Ø6.5 | B - Ø6.0 | C - 6.0	600	NO	NO	38°
DL75231106	7.5 W	4000 K	WHITE	A - Ø6.5 | B - Ø6.0 | C - 6.0	630	NO	NO	38°
DL7336D09	7.5 W	3000 K	BLACK	A - Ø6.5 | B - Ø6.0 | C - 6.0	600	NO	NO	38°
DL7436D09	7.5 W	4000 K	BLACK	A - Ø6.5 | B - Ø6.0 | C - 6.0	630	NO	NO	38°
DL75211108	7.5 W	3000 K	WHITE	A - Ø6.5 | B - Ø6.0 | C - 6.0	600	YES	NO	38°
DL75231108	7.5 W	4000 K	WHITE	A - Ø6.5 | B - Ø6.0 | C - 6.0	630	YES	NO	38°
DL081911	7.5 W	2700 K / 4000K / 6000K	WHITE	A - Ø6.5 | B - Ø6.0 | C - 6.0	570/ 630/ 670	NO	YES	38°


Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

ORRIN

13W








20W






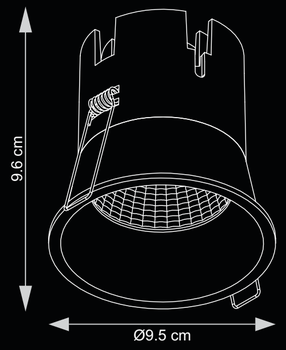


LUMINOUS INTENSITY DISTRIBUTION CURVE


13W




20W



AVERAGE ILLUMINANCE AT A DISTANCE

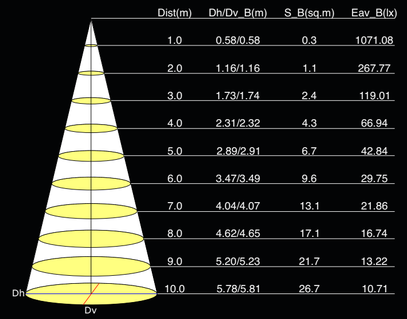

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.58/0.58	0.3	1071.08
2.0	1.16/1.16	1.1	267.77
3.0	1.73/1.74	2.4	119.01
4.0	2.31/2.32	4.3	66.94
5.0	2.89/2.91	6.7	42.84
6.0	3.47/3.49	9.6	29.75
7.0	4.04/4.07	13.1	21.86
8.0	4.62/4.65	17.1	16.74
9.0	5.20/5.23	21.7	13.22
10.0	5.78/5.81	26.7	10.71

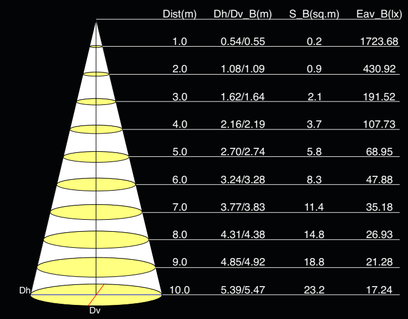

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.54/0.55	0.2	1723.68
2.0	1.08/1.09	0.9	430.92
3.0	1.62/1.64	2.1	191.52
4.0	2.16/2.19	3.7	107.73
5.0	2.70/2.74	5.8	68.95
6.0	3.24/3.28	8.3	47.88
7.0	3.77/3.83	11.4	35.18
8.0	4.31/4.38	14.8	26.93
9.0	4.85/4.92	18.8	21.28
10.0	5.39/5.47	23.2	17.24

ITEM CODE	WATTAGE	CCT	COLOUR	DIMENSIONS (in cms)	LUMENS	DIMMABLE	TUNABLE	BEAM ANGLE
DL13211113	13 W	3000 K	WHITE	A - Ø8.5 | B - Ø8 | C - 8	1050	NO	NO	38°
DL13231113	13 W	4000 K	WHITE	A - Ø8.5 | B - Ø8 | C - 8	1120	NO	NO	38°
DL13336D9	13 W	3000 K	BLACK	A - Ø8.5 | B - Ø8 | C - 8	1050	NO	NO	38°
DL13436D9	13 W	4000 K	BLACK	A - Ø8.5 | B - Ø8 | C - 8	1120	NO	NO	38°
DL20211122	20 W	3000 K	WHITE	A - Ø9.5 | B - Ø9 | C - 9.6	1600	NO	NO	38°
DL20231122	20 W	4000 K	WHITE	A - Ø9.5 | B - Ø9 | C - 9.6	1680	NO	NO	38°
DL131911	13 W	2700 K 4000 K 6000 K	WHITE	A - Ø8.5 | B - Ø8 | C - 8	-	NO	YES	38° 38°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

LEGEND PLUS


LOW GLARE FOR BETTER EYE COMFORT


SDCM<3 FOR BETTER COLOUR CONSISTENCY


VEROS PRO IP 65


30 W







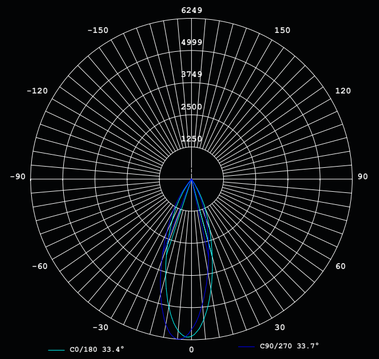

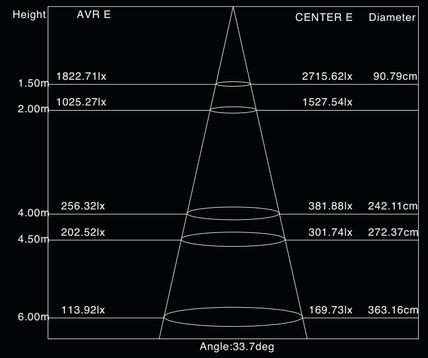

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL3014208	30W	3000K	A - Ø13.5 | B : Ø12.5 | C - 11.0	2400	>80	20	≥2.5	220 V AC - 240 V AC	40°
DL3034209	30W	4000K	A - Ø13.5 | B : Ø12.5 | C - 11.0	2520	>80	20	≥2.5	220 V AC - 240 V AC	40°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

LED COB DOWNLIGHTERS

DESCRIPTION

High performance deep recessed COB downlighters with aluminium housing.

Optimally designed heat sink for better heat dissipation and thus longer life and better light outut.

Specially designed diffuser ensure soft light output for better eye comfort

MATERIAL OF CONSTRUCTION

Die Cast Aluminium with SS mounting clips

TECHNICAL INFORMATION

WATTAGE
Legend Plus: 30W
Veros Pro: 10W

CRI: ≥80, for better light quality

SDCM: ≤4, Superb colour consistency

IP RATING
Legend Plus: IP20,
Veros Pro: IP65,

Input Voltage: 220 V AC-240 V AC

Surge protection: ≥2.5KV

LIFE: ≥30,000 burning hours

Dimmability: Please get in touch with Tisva Team for other Dimming Options


APPLICATION AREA


Residences | Art Galleries | Retail | Museums | Modern Offices


VEROS PRO DIMMABLE

10 W





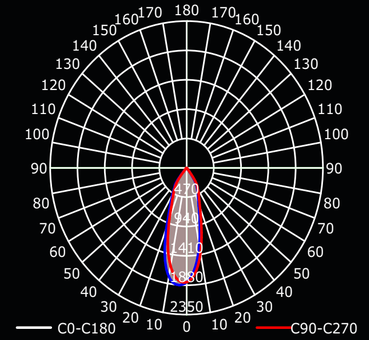

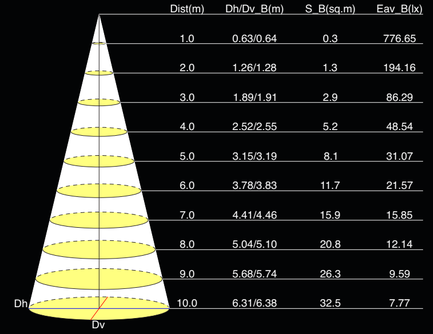

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL1011201	10W	3000K	A - Ø8.2 | B - Ø7.5 | C - 5	900	≥ 80	IP 65	≥2.5kV	220 V AC - 240 V AC	24°
DL1011301	10W	4000K	A - Ø8.2 | B - Ø7.5 | C - 5	960	≥ 80	IP 65	≥2.5kV	220 V AC - 240 V AC	24°
DL0931202	9W	4000K	A - Ø9.5 | B - Ø8.2 | C - 8.7	900	≥ 80	IP 65	≥2.5kV	220 V AC - 240 V AC	24°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

SIZE : 11.5" X 11.5"

GALAXY PRO

DIMMABLE VERSION GVO 12 W


LOW GLARE FOR BETTER EYE COMFORT

HIGH LIGHT OUTPUT

UBER MODERN & SLEEK DESIGN


7 W






12 W





18 W & 25 W





ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL072381Y	7W	3000K	A- Ø8.7 | B- Ø7.5 | C- 5.5	550	80	20	≥2.5	220 V AC - 240 V AC	30°
DL073381Y	7W	4000K	A- Ø8.7 | B- Ø7.5 | C- 5.5	575	80	20	≥2.5	220 V AC - 240 V AC	30°
DL122381Y	12W	3000K	A- Ø11.4 | B- Ø9.5 | C- 7.5	960	80	20	≥2.5	220 V AC - 240 V AC	30°
DL123381Y	12W	4000K	A- Ø11.4 | B- Ø9.5 | C- 7.5	1080	80	20	≥2.5	220 V AC - 240 V AC	30°
DL182381Y	18W	3000K	A- Ø12.5 | B- Ø12.0 | C- 9.5	1440	80	20	≥2.5	220 V AC - 240 V AC	30°
DL183381Y	18W	4000K	A- Ø12.5 | B- Ø12.0 | C- 9.5	1620	80	20	≥2.5	220 V AC - 240 V AC	30°
DL252381Y	25W	3000K	A- Ø12.5 | B- Ø12.0 | C- 9.5	2000	80	20	≥2.5	220 V AC - 240 V AC	30°
DL253381Y	25W	4000K	A- Ø12.5 | B- Ø12.0 | C- 9.5	2125	80	20	≥2.5	220 V AC - 240 V AC	30°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

LED COB DOWNLIGHTERS

DESCRIPTION

Recessed Mounted Round Downlighters. Unique combination of high output and low glare. Precisely designed heat sink ensures faster heat dissipation and thus better life and improved performance

Slim design gels perfectly with clean ceiling to get a sophisticated and contemporary look.

Excellent colour consistency throughout the installation

MATERIAL OF CONSTRUCTION

Aluminium

TECHNICAL INFORMATION

Wattage:
Galaxy pro- 7W, 12W, 18W & 25W
GVO- 6W & 12W

CRI: ≥80, for better light quality

SDCM:
Galaxy pro- ≤7
GVO- ≤3

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP20

Life: ≥30,000 burning hours

Dimmability: Standard Dimmable in GVO 12W. Please get in touch with Tisva Team for other Dimming Options

APPLICATION AREA


Residences | Art Galleries | Retail | Museums | Modern Offices

GVO SIGNATURE SERIES GVO

LED COB DOWNLIGHTERS
SIGNATURE SERIES


6 W





12 W



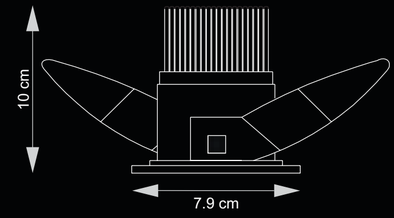

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL6W40D3KN	6 W	3000 K	A- Ø6.4 | B- Ø5.8 | C- 6.5	550	>80	20	≥2.5kV	220 V AC - 240 V AC	40°
DL6W40D4KN	6 W	4000 K	A- Ø6.4 | B- Ø5.8 | C- 6.5	570	>80	20	≥2.5kV	220 V AC - 240 V AC	40°
DL12W38D3K	12 W	3000 K	A- Ø7.9 | B- Ø7.4 | C- 10.0	950	>80	20	≥2.5kV	220 V AC - 240 V AC	38°
DL12W38D4K	12 W	4000 K	A- Ø7.9 | B- Ø7.4 | C- 10.0	980	>80	20	≥2.5kV	220 V AC - 240 V AC	38°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

SIZE : 11.5" X 11.5"

JENO

LOW GLARE FOR BETTER EYE COMFORT

SDCM<4 FOR BETTER COLOUR CONSISTENCY


HIGH LIGHT OUTPUT

UBER MODERN & SLEEK DESIGN

7.5 W








7.5 W







ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (kV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL820905	7.5 W	3000 K	A - 7.5 X 7.5 | B - 6.5 X 6.5 | C - 13.1	450	≥ 80	20	≥2.5	220 V AC - 240 V AC	24°
DL820904	7.5 W	3000 K	A - Ø7.2 | B - Ø6.5 | C - 12.8	450	≥ 80	20	≥2.5	220 V AC - 240 V AC	24°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

LED COB DOWNLIGHTERS

DESCRIPTION

Recessed Mounted Downlighters. Unique combination of high output and very low glare.

Slim design gels perfectly with clean ceiling to get a sophisticated and contemporary look.

Jeno offers 360 degree rotational ability to focus on artworks, features etc.

MATERIAL OF CONSTRUCTION

Aluminium

TECHNICAL INFORMATION

Wattage:
JENO - 7.5W
LINOS - 3W

CRI: ≥80, For Better Light Quality

SDCM: ≤4, Ensures Better Colour Consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5kv

IP Rating: IP20

Life: ≥30,000 Burning Hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA


Residences | Art Galleries | Retail | Museums | Modern Offices

LINOS

LED COB DOWNLIGHTERS

3 W



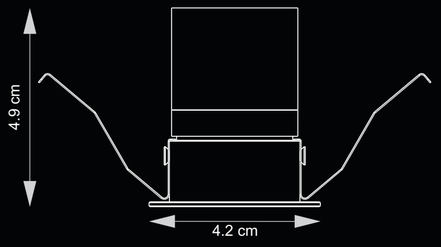

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (kV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL320905	3 W	3000 K	A - Ø4.2 | B - Ø3.8 | C - 4.9	180	≥ 80	20	≥2.5	220 V AC - 240 V A CU	15°


Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height


VENZA PRO

DIE CAST ALUMINIUM HOUSING | WIDE WATTAGE RANGE | LINEAR COB FIXTURE | LOW GLARE | SLEEK DESIGN FOR CLEAN CEILINGS

3 W









5 W







VENZA PRO

DESCRIPTION

The Linear Cob LED is a sophisticated low ceiling product. Clean and minimal, they are the perfect solution for areas that require clean ceilings.

Highly efficient and with low UGR ensures a superior eye comfort

Available in various configuration of modules and wattage

MATERIAL OF CONSTRUCTION

Die Cast Powder Coated Aluminum housing with SS Mounting Clips

TECHNICAL INFORMATION

Wattage:	3W, 5W
CRI:	≥80, For Better Light Quality
SDCM:	≤4, ensures better colour consistency
Input Voltage:	220 V AC - 240 V AC
Surge Protection:	≥2.5KV
IP Rating:	IP 20,
Life:	≥30,000 burning hours
Dimmability:	On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Offices | Conference Halls | Hotels | Showrooms | Residences


LINEAR COB DOWNLIGHTERS

LUMINOUS INTENSITY DISTRIBUTION CURVE


3 W

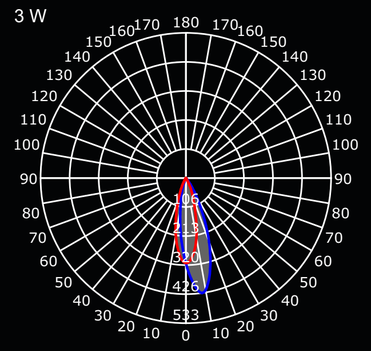


5 W

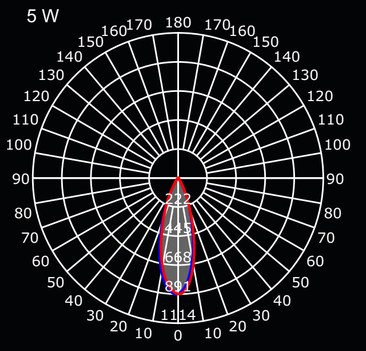

AVERAGE ILLUMINANCE AT A DISTANCE

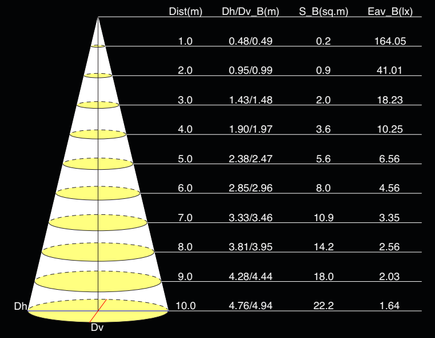

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.48/0.49	0.2	164.05
2.0	0.95/0.99	0.9	41.01
3.0	1.43/1.48	2.0	18.23
4.0	1.90/1.97	3.6	10.25
5.0	2.38/2.47	5.6	6.56
6.0	2.85/2.96	8.0	4.56
7.0	3.33/3.46	10.9	3.35
8.0	3.81/3.95	14.2	2.56
9.0	4.28/4.44	18.0	2.03
10.0	4.76/4.94	22.2	1.64

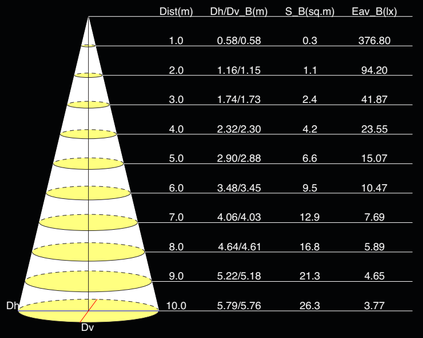

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.58/0.58	0.3	376.80
2.0	1.16/1.15	1.1	94.20
3.0	1.74/1.73	2.4	41.87
4.0	2.32/2.30	4.2	23.55
5.0	2.90/2.88	6.6	15.07
6.0	3.48/3.45	9.5	10.47
7.0	4.06/4.03	12.9	7.69
8.0	4.64/4.61	16.8	5.89
9.0	5.22/5.18	21.3	4.65
10.0	5.79/5.76	26.3	3.77

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMEN	BEAM ANGLE
DL3257012	3 W	3000 K	A - 4.5L X 4.5W | B - 3.8L X 3.8W | C - 4.8	150	32°
DL3357013	3 W	4000 K	A - 4.5L X 4.5W | B - 3.8L X 3.8W | C - 4.8	155	32°
DL5257022	5 W	3000 K	A - 7.3L X 4.5W | B - 6.6L X 3.8W | C - 4.8	300	28°
DL5357023	5 W	4000 K	A - 7.3L X 4.5W | B - 6.6L X 3.8W | C - 4.8	310	28°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

VENZA PRO

DIE CAST ALUMINIUM HOUSING

WIDE WATTAGE RANGE


LINEAR COB FIXTURE


LOW GLARE

SLEEK DESIGN FOR CLEAN CEILINGS

13 W




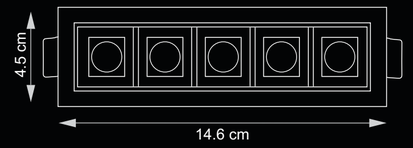




30 W



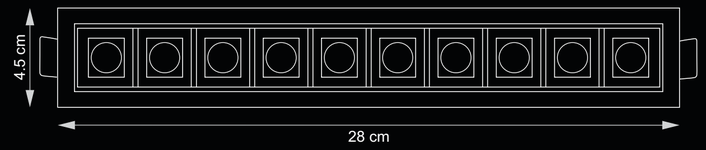



VENZA PRO

DESCRIPTION

The Linear Cob LED is a sophisticated low ceiling product. Clean and minimal, they are the perfect solution for areas that require clean ceilings.

Highly efficient and with low glare ensures a superior eye comfort

Available in various configuration of modules and wattage

MATERIAL OF CONSTRUCTION

Die Cast Powder Coated Aluminum housing with SS Mounting Clips

TECHNICAL INFORMATION

Wattage:	13W & 30W
CRI:	≥80, For Better Light Quality
SDCM:	≤4, ensures superb colour consistency
Input Voltage:	220 V AC - 240 V AC
Surge Protection:	≥2.5KV
IP Rating:	IP 20,
Life:	≥30,000 burning hours
Dimmability:	On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Offices | Conference Halls | Hotels | Showrooms | Residences


LINEAR COB DOWNLIGHTERS

LUMINOUS INTENSITY DISTRIBUTION CURVE


13 W

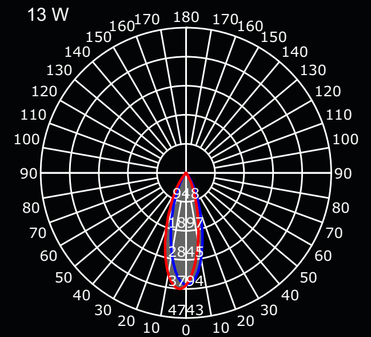


30 W

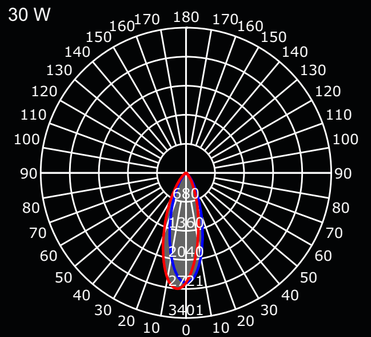

AVERAGE ILLUMINANCE AT A DISTANCE

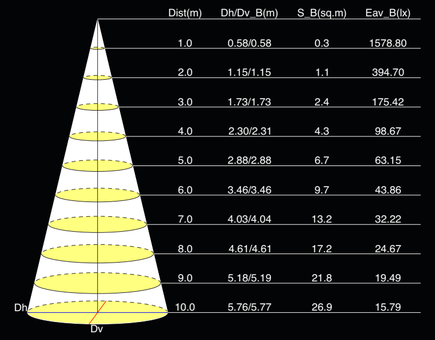

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.58/0.58	0.3	1578.80
2.0	1.15/1.15	1.1	394.70
3.0	1.73/1.73	2.4	175.42
4.0	2.30/2.31	4.3	98.67
5.0	2.88/2.88	6.7	63.15
6.0	3.46/3.46	9.7	43.86
7.0	4.03/4.04	13.2	32.22
8.0	4.61/4.61	17.2	24.67
9.0	5.18/5.19	21.8	19.49
10.0	5.76/5.77	26.9	15.79

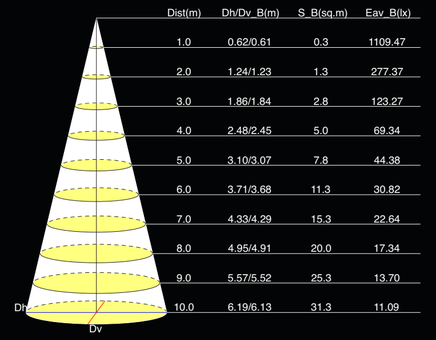

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.62/0.61	0.3	1109.47
2.0	1.24/1.23	1.3	277.37
3.0	1.86/1.84	2.8	123.27
4.0	2.48/2.45	5.0	69.34
5.0	3.10/3.07	7.8	44.38
6.0	3.71/3.68	11.3	30.82
7.0	4.33/4.29	15.3	22.64
8.0	4.95/4.91	20.0	17.34
9.0	5.57/5.52	25.3	13.70
10.0	6.19/6.13	31.3	11.09

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMEN	BEAM ANGLE
DL1325705	13 W	3000 K	A - 14.6L X 4.5W | B - 14L X 3.8W | C - 4.8	750	32°
DL1335705	13 W	4000 K	A - 14.6L X 4.5W | B - 14L X 3.8W | C - 4.8	780	32°
DL3025710	30 W	3000 K	A - 28.0L X 4.5W | B - 27.0L X 3.8W | C - 4.8	1650	32°
DL3035710	30 W	4000 K	A - 28.0L X 4.5W | B - 27.0L X 3.8W | C - 4.8	1720	32°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

VENZA 180

DIE CAST ALUMINIUM HOUSING

LINEAR COB WALL WASHER


ZERO LEVEL WALL WASH


UNIFORM WALL WASH

SLEEK DESIGN FOR CLEAN CEILINGS

13W




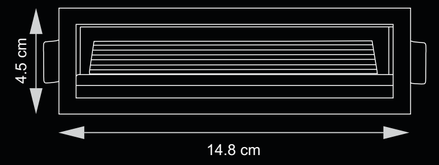




25W



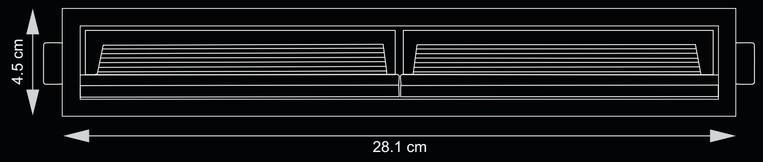



SIZE : 11.5" X 11.5"

VENZA 180

DESCRIPTION

The Linear Cob Wall Washer provides uniform and zero level wall wash, that is ideal for accentuating paintings, works of art or feature walls.

Clean and minimal, they are perfect for achieving clean ceilings.

MATERIAL OF CONSTRUCTION

Die Cast Powder Coated Aluminum housing with SS Mounting Clips

TECHNICAL INFORMATION

Wattage: 13W & 25W

CRI: ≥80, For Better Light Quality

SDCM: ≤3, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Wall Washing applications like highlighting feature walls, paintings, works of art, etc.


LINEAR COB WALL WASHER

LUMINOUS INTENSITY DISTRIBUTION CURVE


13W

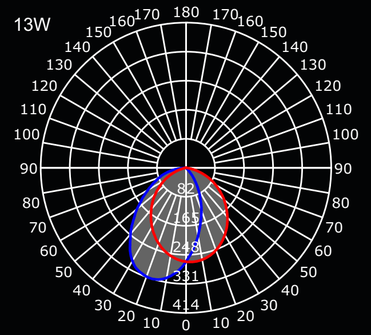


25W

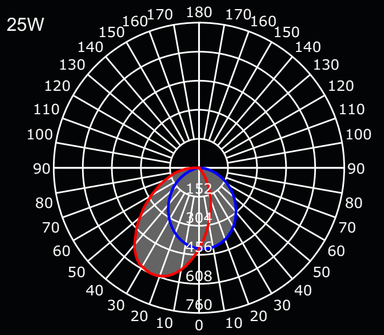

AVERAGE ILLUMINANCE AT A DISTANCE

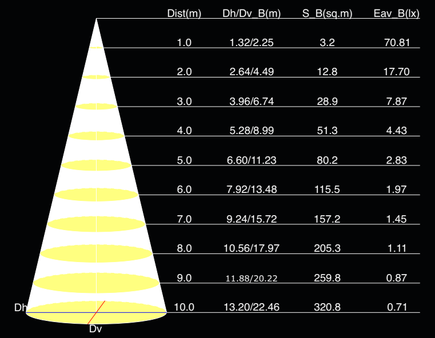

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1.32/2.25	3.2	70.81
2.0	2.64/4.49	12.8	17.70
3.0	3.96/6.74	28.9	7.87
4.0	5.28/8.99	51.3	4.43
5.0	6.60/11.23	80.2	2.83
6.0	7.92/13.48	115.5	1.97
7.0	9.24/15.72	157.2	1.45
8.0	10.56/17.97	205.3	1.11
9.0	11.88/20.22	259.8	0.87
10.0	13.20/22.46	320.8	0.71

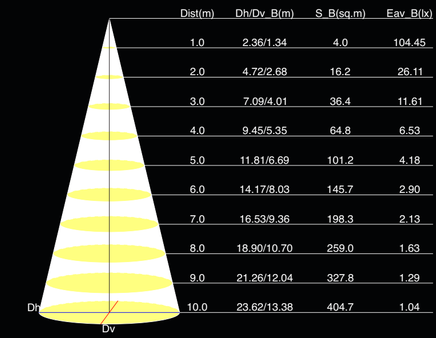

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2.36/1.34	4.0	104.45
2.0	4.72/2.68	16.2	26.11
3.0	7.09/4.01	36.4	11.61
4.0	9.45/5.35	64.8	6.53
5.0	11.81/6.69	101.2	4.18
6.0	14.17/8.03	145.7	2.90
7.0	16.53/9.36	198.3	2.13
8.0	18.90/10.70	259.0	1.63
9.0	21.26/12.04	327.8	1.29
10.0	23.62/13.38	404.7	1.04


ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMEN	BEAM ANGLE
DL13W3K02R	13 W	3000 K	A - 14.8L X 4.5W | B - 14L X 3.7W | C - 4.3	715	100°
DL13W4K02R	13 W	4000 K	A - 14.8L X 4.5W | B - 14L X 3.7W | C - 4.3	750	100°
DL25W3K02R	25 W	3000 K	A - 28.1L X 4.5W | B - 27.5L X 3.7W | C - 4.3	1370	100°
DL25W4K02R	25 W	4000 K	A - 28.1L X 4.5W | B - 27.5L X 3.7W | C - 4.3	1430	100°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

VENZA ULTRA SLIM SIGNATURE SERIES

DIE CAST ALUMINIUM HOUSING | CRI>=90 | SUPER SLIM DESIGN | UGR<13


3W




7.5W



13W

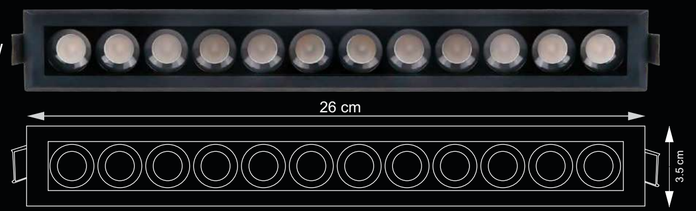



ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMEN	BEAM ANGLE
DL0333US09	3 W	3000 K	A - 7.8L X 3.5W | B - 7L X 2.8W | C - 3.5	175	30°
DL0334US09	3 W	4000 K	A - 7.8L X 3.5W | B - 7L X 2.8W | C - 3.5	185	30°
DL0833US09	7.5 W	3000 K	A - 13.9L X 3.5W | B - 13.1L X 2.8W | C - 3.5	523	30°
DL0834US09	7.5 W	4000 K	A - 13.9L X 3.5W | B - 13.1L X 2.8W | C - 3.5	550	30°
DL1333US09	13 W	3000 K	A - 26L X 3.5W | B - 25.1L X 2.8W | C - 3.5	975	30°
DL1334US09	13 W	4000 K	A - 26L X 3.5W | B - 25.1L X 2.8W | C - 3.5	1020	30°

VENZA ULTRA SLIM

DESCRIPTION

Ultra slim linear COB downlighter.

Superb quality of Light with best in class colour rendering properties

coupled with excellent colour consistency. A very Low UGR makes this state of the art product ideal for any contemporary space, be it residence or office.

MATERIAL OF CONSTRUCTION

Die Cast Powder Coated Aluminum housing with SS Mounting Clips

TECHNICAL INFORMATION

Wattage: 13W, 7,5W & 13W

CRI: ≥90, For Better Light Quality

SDCM: ≤3, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Offices | Conference Halls | Hotels | Showrooms | Residences


SLIM LINEAR DOWNLIGHTER
SIGNATURE SERIES

LUMINOUS INTENSITY DISTRIBUTION CURVE


3W




7.5W




13W

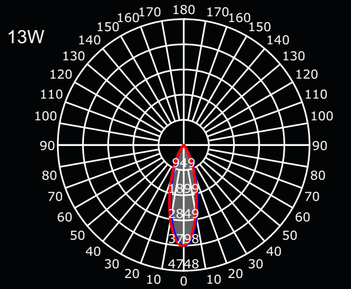


AVERAGE ILLUMINANCE AT A DISTANCE

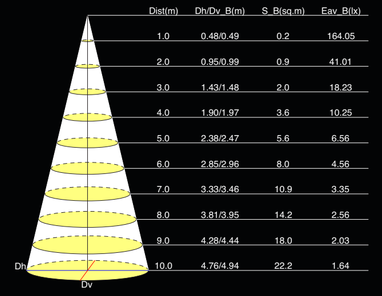

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.48/0.49	0.2	164.05
2.0	0.95/0.99	0.9	41.01
3.0	1.43/1.48	2.0	18.23
4.0	1.90/1.97	3.6	10.25
5.0	2.38/2.47	5.6	6.56
6.0	2.85/2.96	8.0	4.56
7.0	3.33/3.46	10.9	3.35
8.0	3.81/3.95	14.2	2.56
9.0	4.28/4.44	18.0	2.03
10.0	4.76/4.94	22.2	1.64

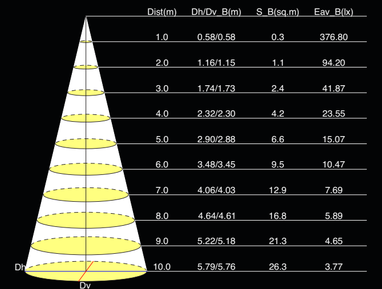

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.58/0.58	0.3	376.80
2.0	1.16/1.15	1.1	94.20
3.0	1.74/1.73	2.4	41.87
4.0	2.32/2.30	4.2	23.55
5.0	2.90/2.88	6.6	15.07
6.0	3.48/3.45	9.5	10.47
7.0	4.06/4.03	12.9	7.69
8.0	4.64/4.61	16.8	5.89
9.0	5.22/5.18	21.3	4.65
10.0	5.79/5.76	26.3	3.77

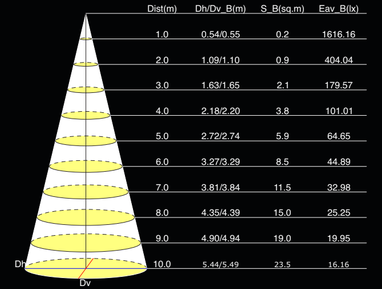

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.54/0.55	0.2	1616.16
2.0	1.09/1.10	0.9	404.04
3.0	1.63/1.65	2.1	179.57
4.0	2.18/2.20	3.8	101.01
5.0	2.72/2.74	5.9	64.65
6.0	3.27/3.29	8.5	44.89
7.0	3.81/3.84	11.5	32.98
8.0	4.35/4.39	15.0	25.25
9.0	4.90/4.94	19.0	19.95
10.0	5.44/5.49	23.5	16.16

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

RIO SF SHORT HEIGHT SIGNATURE SERIES


LOW GLARE FOR BETTER EYE COMFORT

SDCM<3 FOR BETTER COLOUR CONSISTENCY


HIGH LIGHT OUTPUT

UBER MODERN & SLEEK DESIGN

6 W





12 W




18 W









ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
DL063SHSQ	6 W	3000K	L - 6.2 | W - 6.2 | H - 6.2	420 LM	≥80	20	220 V AC - 240 V AC	40°
DL064SHSQ	6 W	4000K	L - 6.2 | W - 6.2 | H - 6.2	440 LM	≥80	20	220 V AC - 240 V AC	40°
DL123SHSQ	12 W	3000K	L - 8.1 | W - 8.1 | H - 8.1	940 LM	≥80	20	220 V AC - 240 V AC	40°
DL124SHSQ	12 W	4000K	L - 8.1 | W - 8.1 | H - 8.1	980 LM	≥80	20	220 V AC - 240 V AC	40°
DL183SHSQ	18 W	3000K	L - 10.0 | W - 10.0 | H - 7.0	1440 LM	≥80	20	220 V AC - 240 V AC	40°
DL184SHSQ	18 W	4000K	L - 10.0 | W - 10.0 | H - 7.0	1500 LM	≥80	20	220 V AC - 240 V AC	40°

Dimensions: L- Length | W- Width I H- Height

RIO SF SHORT HEIGHT

DESCRIPTION

Surface Mounted square Downlighters. Unique combination of high output and very low glare.

Slim design gels perfectly with clean ceiling to get a sophisticated and contemporary look.

Excellent colour consistency throughout the installation

MATERIAL OF CONSTRUCTION

Aluminium

TECHNICAL INFORMATION

Wattage: 6W, 12W & 18W

CRI: ≥80, For Better Light Quality

SDCM: ≤3, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices


SURFACE MOUNTED SQUARE DOWNLIGHTER
SIGNATURE SERIES

LUMINOUS INTENSITY DISTRIBUTION CURVE


6 W

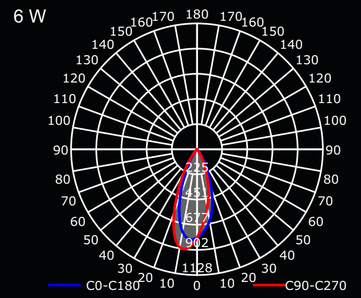


12 W

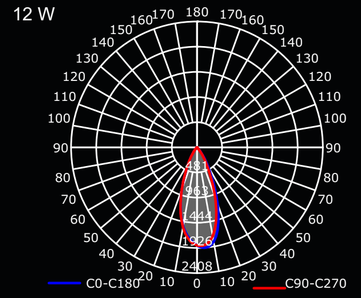


18 W

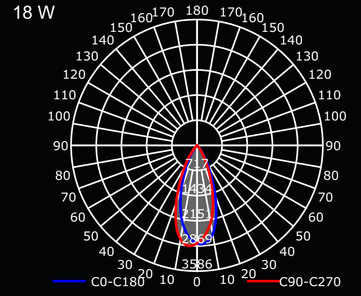


AVERAGE ILLUMINANCE AT A DISTANCE

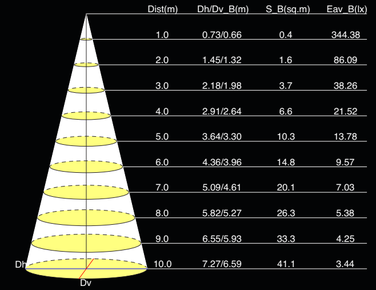

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.73/0.66	0.4	344.38
2.0	1.45/1.32	1.6	86.09
3.0	2.18/1.98	3.7	38.26
4.0	2.91/2.64	6.6	21.52
5.0	3.64/3.30	10.3	13.78
6.0	4.36/3.96	14.8	9.57
7.0	5.09/4.61	20.1	7.03
8.0	5.82/5.27	26.3	5.38
9.0	6.55/5.93	33.3	4.25
10.0	7.27/6.59	41.1	3.44

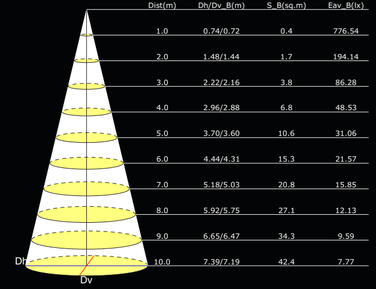

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.74/0.72	0.4	776.54
2.0	1.48/1.44	1.7	194.14
3.0	2.22/2.16	3.8	86.28
4.0	2.96/2.88	6.8	48.53
5.0	3.70/3.60	10.6	31.06
6.0	4.44/4.31	15.3	21.57
7.0	5.18/5.03	20.8	15.85
8.0	5.92/5.75	27.1	12.13
9.0	6.65/6.47	34.3	9.59
10.0	7.39/7.19	42.4	7.77

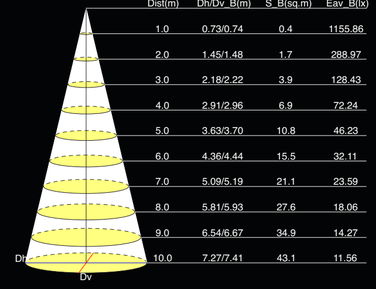

Dist(m)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.73/0.74	0.4	1155.86
2.0	1.45/1.48	1.7	288.97
3.0	2.18/2.22	3.9	128.43
4.0	2.91/2.96	6.9	72.24
5.0	3.63/3.70	10.8	46.23
6.0	4.36/4.44	15.5	32.11
7.0	5.09/5.19	21.1	23.59
8.0	5.81/5.93	27.6	18.06
9.0	6.54/6.67	34.9	14.27
10.0	7.27/7.41	43.1	11.56

RIO SF
ROUND

LOW GLARE FOR BETTER EYE COMFORT

SDCM<3 FOR BETTER COLOUR CONSISTENCY

HIGH LIGHT OUTPUT

UBER MODERN & SLEEK DESIGN

6 W





12 W




18 W









ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	COLOUR	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
DL0611101	6 W	3000K	D -5.5 | H - 8.6	WHITE	500 LM	≥80	20	220 V AC - 240 V AC	30°
DL0631101	6 W	4000K	D -5.5 | H - 8.6	WHITE	525 LM	≥80	20	220 V AC - 240 V AC	30°
DL0610901	6 W	3000K	D -5.5 | H - 8.6	BLACK	500 LM	≥80	20	220 V AC - 240 V AC	30°
DL0630901	6 W	4000K	D -5.5 | H - 8.6	BLACK	525 LM	≥80	20	220 V AC - 240 V AC	30°
DL1211102	12 W	3000K	D -7.5 | H - 11.0	WHITE	900 LM	≥80	20	220 V AC - 240 V AC	30°
DL1231102	12 W	4000K	D -7.5 | H - 11.0	WHITE	945 LM	≥80	20	220 V AC - 240 V AC	30°
DL1210901	12 W	3000K	D -7.5 | H - 11.0	BLACK	900 LM	≥80	20	220 V AC - 240 V AC	30°
DL1230901	12 W	4000K	D -7.5 | H - 11.0	BLACK	945 LM	≥80	20	220 V AC - 240 V AC	30°
DL1810901	18 W	3000K	D -9.5 | H - 13.0	WHITE	1350 LM	≥80	20	220 V AC - 240 V AC	30°
DL1830901	18 W	4000K	D -9.5 | H - 13.0	WHITE	1410 LM	≥80	20	220 V AC - 240 V AC	30°
DL1811103	18 W	3000K	D -9.5 | H - 13.0	BLACK	1350 LM	≥80	20	220 V AC - 240 V AC	30°
DL1831103	18 W	4000K	D -9.5 | H - 13.0	BLACK	1410 LM	≥80	20	220 V AC - 240 V AC	30°

Dimensions: D- Diameter | H - Height

RIO SF

DESCRIPTION

Surface Mounted Square & Round Downlighters.

Choice of Black, Golden, Chrome Reflector to match with the interiors.

Smooth, Clean Cut design for a sophisticated and contemporary look.

Unique combination of high output and low glare.

Wide range of wattages to choose from.

Excellent colour consistency throughout the installation with superior SDCM Rating

MATERIAL OF CONSTRUCTION

Extruded / Pressure Die Cast Powder Coated Aluminium

TECHNICAL INFORMATION

Wattage: 6W, 12W & 18W

CRI: ≥80, For Better Light Quality

SDCM: ≤3, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices

RIO SF
SQUARE

SURFACE MOUNTED SQUARE DOWNLIGHTER

6 W





12 W




18 W










ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	COLOUR	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
DL06291	6 W	3000K	L-5.5 | W-5.5 | H-8.6	BLACK	500 LM	≥80	20	220 V AC - 240 V AC	30°
DL06391	6 W	4000K	L-5.5 | W-5.5 | H-8.6	BLACK	525 LM	≥80	20	220 V AC - 240 V AC	30°
DL06221	6 W	3000K	L-5.5 | W-5.5 | H-8.6	BLACK-GOLD	500 LM	≥80	20	220 V AC - 240 V AC	30°
DL06321	6 W	4000K	L-5.5 | W-5.5 | H-8.6	BLACK-GOLD	525 LM	≥80	20	220 V AC - 240 V AC	30°
DL12291	12 W	3000K	L-7.5 | W-7.5 | H-11.0	BLACK	900 LM	≥80	20	220 V AC - 240 V AC	30°
DL12391	12 W	4000K	L-7.5 | W-7.5 | H-11.0	BLACK	945 LM	≥80	20	220 V AC - 240 V AC	30°
DL12221	12 W	3000K	L-7.5 | W-7.5 | H-11.0	BLACK-GOLD	900 LM	≥80	20	220 V AC - 240 V AC	30°
DL12321	12 W	4000K	L-7.5 | W-7.5 | H-11.0	BLACK-GOLD	945 LM	≥80	20	220 V AC - 240 V AC	30°
DL18291	18 W	3000K	L-9.5 | W-9.5 | H-13.0	BLACK	1424 LM	≥80	20	220 V AC - 240 V AC	30°
DL18391	18 W	4000K	L-9.5 | W-9.5 | H-13.0	BLACK	1495 LM	≥80	20	220 V AC - 240 V AC	30°
DL18221	18 W	3000K	L-9.5 | W-9.5 | H-13.0	BLACK-GOLD	1424 LM	≥80	20	220 V AC - 240 V AC	30°
DL18321	18 W	4000K	L-9.5 | W-9.5 | H-13.0	BLACK-GOLD	1495 LM	≥80	20	220 V AC - 240 V AC	30°

Dimensions: L- Length | W- Width I H- Height

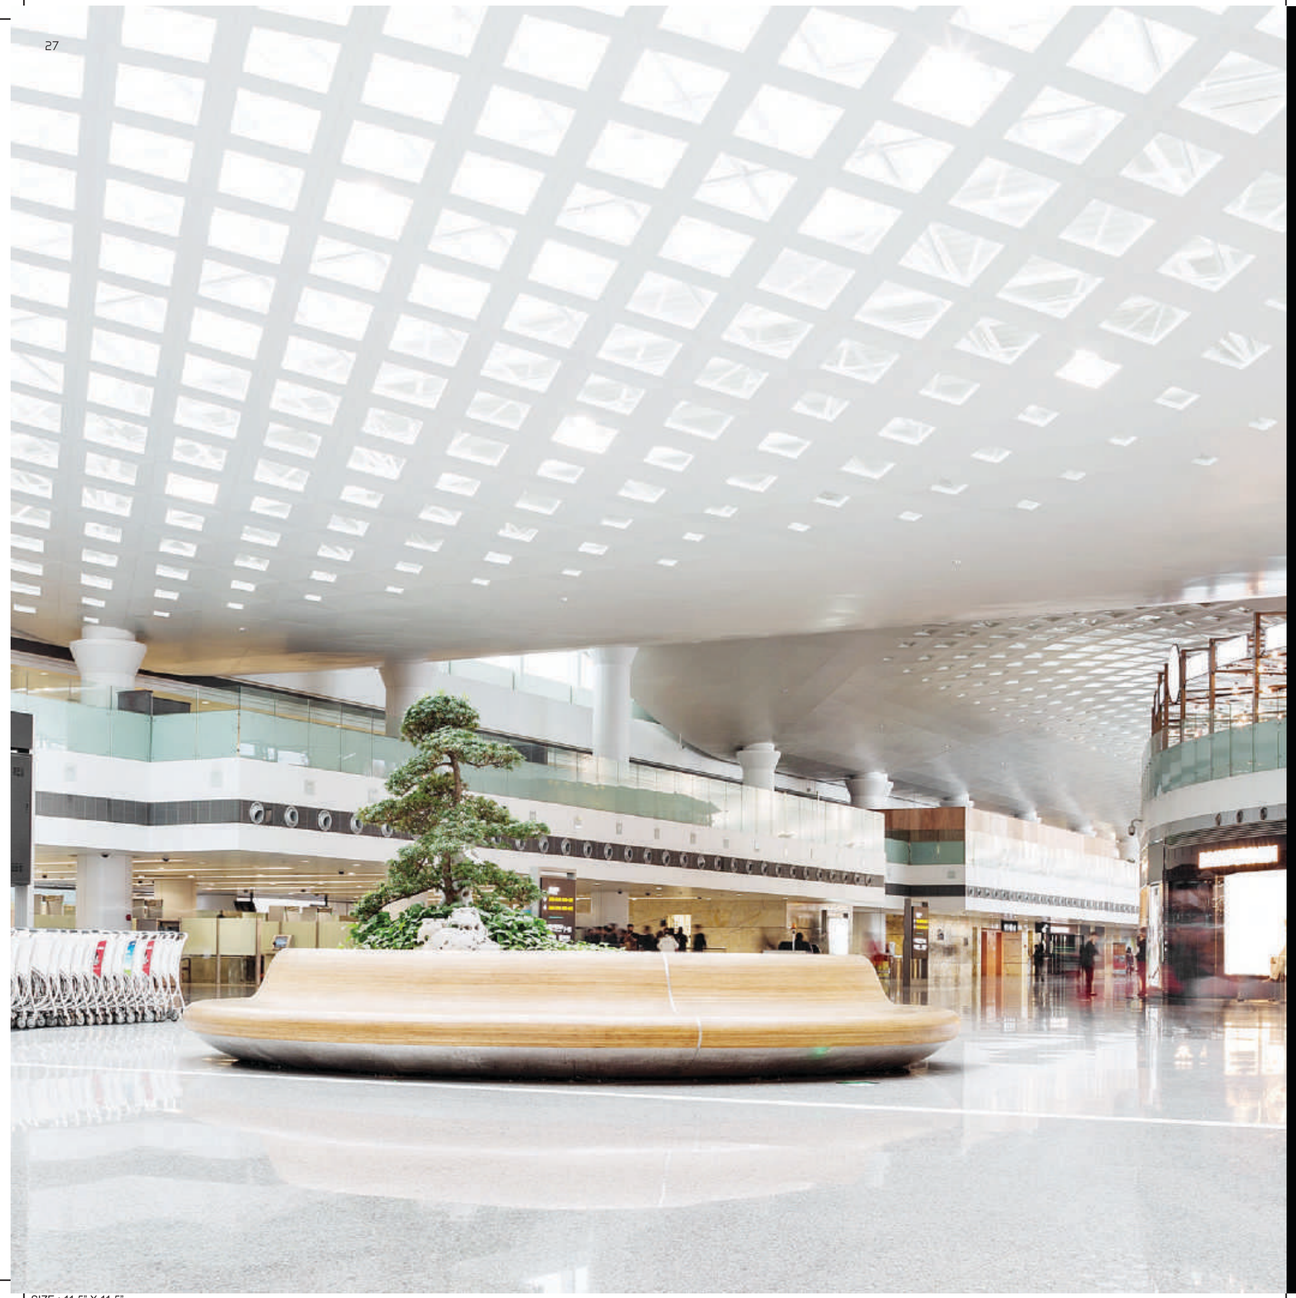

RINGS & LED MODULE

IVEX COB RINGS | IVEX PRO COB RINGS | IVEX TRIMLESS COB RINGS | EAGLE COB RINGS | GIMBAL COB RINGS

IVEX PRIME LED MODULE | EAGLE LED MODULE | EAGLE PRO LED MODULE

SIZE : 11.5" X 11.5"

IVEX PRIME

DIE CAST ALUMINIUM HOUSING

SEMI MODULAR DESIGN


CHOICE OF "RINGS"


15W




10W

















IVEX PRIME

DESCRIPTION

Downlighter Module, Ivex prime is to be used in combination with a suitable Ivex Ring.

Large variety of application specifc "Rings" are available with options in Fixed, Adjustable(Tiltable), Wall washer applications.

Choose from a wide colour range of rings to match your interiors

MATERIAL OF CONSTRUCTION

Aluminium Die Cast Housing for better heat dissipation and sturdiness.

TECHNICAL INFORMATION

Wattage: 10W & 15W

CRI: ≥90, For Better Light Quality

SDCM: ≤3, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Residences | Modern Work Spaces | Executive Cabins | Hotels | Showrooms


LED MODULE

LUMINOUS INTENSITY DISTRIBUTION CURVE


15W




10W



AVERAGE ILLUMINANCE AT A DISTANCE

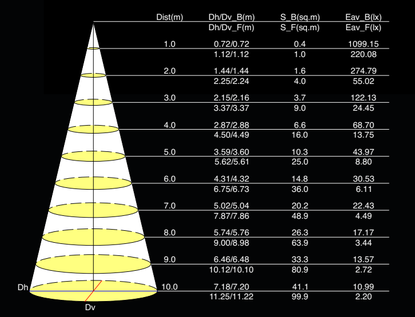

Dist(m)	Dh/Dv_B(m) Dh/Dv_F(m)	S_B(sq.m) S_F(sq.m)	Eav_B(lx) Eav_F(lx)
1.0	0.72/0.72	0.4	1099.15
	1.12/1.12	1.0	220.08
2.0	1.44/1.44	1.6	274.79
	2.25/2.24	4.0	55.02
3.0	2.15/2.16	3.7	122.13
	3.37/3.37	9.0	24.45
4.0	2.87/2.88	6.6	68.70
	4.50/4.49	16.0	13.75
5.0	3.59/3.60	10.3	43.97
	5.62/5.61	25.0	8.80
6.0	4.31/4.32	14.8	30.53
	6.75/6.73	36.0	6.11
7.0	5.02/5.04	20.2	22.43
	7.87/7.86	48.9	4.49
8.0	5.74/5.76	26.3	17.17
	9.00/8.98	63.9	3.44
9.0	6.46/6.48	33.3	13.57
	10.12/10.10	80.9	2.72
10.0	7.18/7.20	41.1	10.99
	11.25/11.22	99.9	2.20

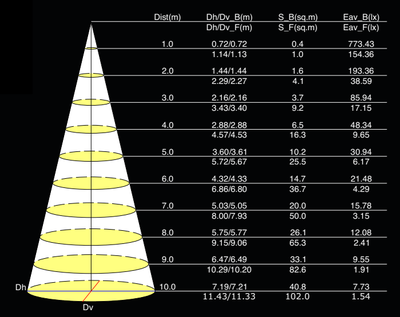

Dist(m)	Dh/Dv_B(m) Dh/Dv_F(m)	S_B(sq.m) S_F(sq.m)	Eav_B(lx) Eav_F(lx)
1.0	0.72/0.72	0.4	773.43
	1.14/1.13	1.0	154.36
2.0	1.44/1.44	1.6	193.36
	2.29/2.27	4.1	38.59
3.0	2.16/2.16	3.7	85.94
	3.43/3.40	9.2	17.15
4.0	2.88/2.88	6.5	48.34
	4.57/4.53	16.3	9.65
5.0	3.60/3.61	10.2	30.94
	5.72/5.67	25.5	6.17
6.0	4.32/4.33	14.7	21.48
	6.86/6.80	36.7	4.29
7.0	5.03/5.05	20.0	15.78
	8.00/7.93	50.0	3.15
8.0	5.75/5.77	26.1	12.08
	9.15/9.06	65.3	2.41
9.0	6.47/6.49	33.1	9.55
	10.29/10.20	82.6	1.91
10.0	7.19/7.21	40.8	7.73
	11.43/11.33	102.0	1.54

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	DIMMABLE	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DL1011211A	10W	2700K	A - Ø5.6 | C - 5.8	820	≥ 80	Yes	20	≤2.0	220 V AC- 240 V AC	40°
DL1031211A	10W	4000K	A - Ø5.6 | C - 5.8	860	≥ 80	Yes	20	≤2.0	220 V AC- 240 V AC	40°
DL1011211N	10W	2700K	A - Ø5.6 | C - 5.8	820	≥ 80	No	20	≤2.0	220 V AC- 240 V AC	40°
DL1031211N	10W	4000K	A - Ø5.6 | C - 5.8	860	≥ 80	No	20	≤2.0	220 V AC- 240 V AC	40°
DL1511211A	15W	2700K	A - Ø6.3 | C - 6.5	1250	≥ 80	Yes	20	≤2.0	220 V AC- 240 V AC	40°
DL1531211A	15W	4000K	A - Ø6.3 | C - 6.5	1310	≥ 80	Yes	20	≤2.0	220 V AC- 240 V AC	40°
DL1511211N	15W	2700K	A - Ø6.3 | C - 6.5	1250	≥ 80	No	20	≤2.0	220 V AC- 240 V AC	40°
DL1531211N	15W	4000K	A - Ø6.3 | C - 6.5	1310	≥ 80	No	20	≤2.0	220 V AC- 240 V AC	40°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

IVEX COB RINGS

DIE CAST ALUMINIUM


APPLICATION SPECIFIC DESIGNS


MULTIPLE COLOUR COMBINATIONS

SUITABLE FOR IVEX & EAGLE MODULES

TRIMLESS VERSION AVAILABLE


RECESSED TILTABLE






	ITEM CODE	COLOR
	T-HB463635WC	TRIM : WHITE REFLECTOR : CROME
	T-HB463635WG	TRIM : WHITE REFLECTOR : GOLD
	T-HB463635WS	TRIM : WHITE REFLECTOR : SILVER
	T-HB463635W	TRIM : WHITE REFLECTOR : WHITE
	T-HB463635B	TRIM : BLACK REFLECTOR : BLACK
	T-HB463635BG	TRIM : BLACK REFLECTOR : GOLD
	T-HB463635WB	TRIM : WHITE REFLECTOR : BLACK

DEEP RECESSED FIXED





	ITEM CODE	COLOR
	T-HB46366WC	TRIM : WHITE REFLECTOR : CROME
	T-HB46366WG	TRIM : WHITE REFLECTOR : GOLD
	T-HB46366WS	TRIM : WHITE REFLECTOR : SILVER
	T-HB46366W	TRIM : WHITE REFLECTOR : WHITE
	T-HB46366B	TRIM : BLACK REFLECTOR : BLACK
	T-HB46366BG	TRIM : BLACK REFLECTOR : GOLD
	T-HB46366WB	TRIM : WHITE REFLECTOR : BLACK

IVEX COB RINGS

DESCRIPTION

Ivex Rings are a combination of Trim and reflector with a variety of Designs

Flexibility of use with different wattage LED modules as per requirement. Suitable for Ivex and Eagle Modules

Choice of Fixed, tiltable,deep recessed & wall washer version

Wide range of colour options of *Trim* and *Reflector* to choose from, to match your interiors

Trimless version available for a cleaner and smoother look

Square version available for select options

MATERIAL OF CONSTRUCTION


Die cast aluminium body with SS mounting clips for ease of mounting & durability

APPLICATION AREA

Residences | Modern Work Spaces | Executive Cabins | Hotels | Showrooms


WALL WASHER DEEP RECESSED






	ITEM CODE	COLOR
	T-HB46365WC	TRIM: WHITE REFLECTOR: CROME
	T-HB46365WG	TRIM: WHITE REFLECTOR: GOLD
	T-HB46365WS	TRIM: WHITE REFLECTOR: SILVER
	T-HB46365W	TRIM: WHITE REFLECTOR: WHITE
	T-HB46365B	TRIM: BLACK REFLECTOR: BLACK
	T-HB46365BG	TRIM: BLACK REFLECTOR: GOLD
	T-HB46365WB	TRIM: WHITE REFLECTOR: BLACK

WALL WASHER






	ITEM CODE	COLOR
	T-HB46371WC	TRIM: WHITE REFLECTOR: CROME
	T-HB46371WG	TRIM: WHITE REFLECTOR: GOLD
	T-HB46371WS	TRIM: WHITE REFLECTOR: SILVER
	T-HB46371W	TRIM: WHITE REFLECTOR: WHITE
	T-HB46371B	TRIM: BLACK REFLECTOR: BLACK
	T-HB46371BG	TRIM: BLACK REFLECTOR: GOLD

IVEX COB RINGS

RECESSED SQUARE






CUT OUT- 7.5 cm X 7.5 cm

	ITEM CODE	COLOR
	T-HB46367WC	TRIM: WHITE REFLECTOR: CROME
	T-HB46367WG	TRIM: WHITE REFLECTOR: GOLD
	T-HB46367WS	TRIM: WHITE REFLECTOR: SILVER
	T-HB46367W	TRIM: WHITE REFLECTOR: WHITE
	T-HB46367B	TRIM: BLACK REFLECTOR: BLACK
	T-HB46367BG	TRIM: BLACK REFLECTOR: GOLD

TRIM LESS





CUT OUT- Ø7.2 cm

	ITEM CODE	COLOR
	ER112WRC	WHITE - RED COPPER
	ER119WBC	WHITE - BLACK
	ER092BRC	BLACK - RED COPPER
	ER111WW	WHITE - WHITE

IVEX PRO COB RINGS

DIE CAST ALUMINIUM

APPLICATION SPECIFIC DESIGNS

MULTIPLE COLOUR COMBINATIONS

SUITABLE FOR IVEX MODULES

TRIMLESS VERSION AVAILABLE

DESCRIPTION

Ivex Pro Rings are a combination of Trim and reflector with a variety of Designs

Flexibility of use with different wattage LED modules as per requirement.

Wide range of colour options of *Trim* and *Reflector* to choose from, to match your interiors

Trimless version available for a cleaner and smoother look


MATERIAL OF CONSTRUCTION

Die cast aluminium body with
SS mounting clips for ease of mounting & durability

APPLICATION AREA

Residences | hotels | Conference halls | Showrooms


RECESSED ROUND






CUT OUT- Ø7.2 cm

	ITEM CODE	COLOR
	IPAR0092	WHITE
	IPAR0093	WHITE - BLACK
	IPAR0083	WHITE
	IPAR0095	WHITE - BLACK
	IPAR0085	WHITE - BLACK

TRIMLESS ROUND



CUT OUT- Ø7.2 cm

	ITEM CODE	COLOR
	IPAR0102	FRAME : WHITE REFLECTOR : CHROME GOLD
	IPAR0103	FRAME : WHITE REFLECTOR : WHITE
	IPAR0104	FRAME : WHITE REFLECTOR : MATT GOLD
	IPAR0105	FRAME : WHITE REFLECTOR : BLACK CHROME
	IPAR0107	FRAME : BLACK REFLECTOR : CHROME

GIMBAL RINGS
RECESSED SQUARE

DIE CAST ALUMINIUM

APPLICATION SPECIFIC DESIGNS

MULTIPLE COLOUR COMBINATIONS


SUITABLE FOR IVEX & EAGLE MODULES


TRIMLESS VERSION AVAILABLE












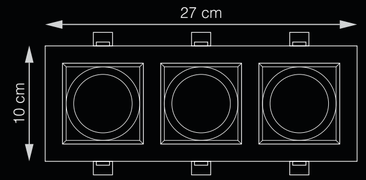

ITEM CODE	GART241	GART242	GART243
COLOR	BLACK	BLACK	BLACK

GIMBAL & EAGLE COB RINGS

DESCRIPTION

EAGLE COB RINGS

A combination of Trim and reflector with variety of Designs

Flexibility of use with different wattage LED modules as perrequirement

Wide range of colour options of *Trim* and *Reflector* to choose from, to match your interiors

Suitable for Eagle COB LED Module

GIMBAL RINGS

Die Cast Aluminium Frame / Housing with SS Mounting Clips

Especially suitable for Retail, Museum application to highlight objects/artefacts

Tiltable to enable accentuating as per the requirement

Can be used with Ivex and Eagle modules.

Available in 1M, 2M and 3M configuration

MATERIAL OF CONSTRUCTION


Die cast aluminium body with SS mounting clips for ease of mounting & durability

APPLICATION AREA

Residences | hotels | Conference halls | Showrooms

EAGLE COB RINGS
RECESSED ROUND

COB RINGS



	ITEM CODE	COLOR
	ER7929WRC	TRIM: WHITE REFLECTOR: RED COPPER
	ER7929BB	TRIM: BLACK REFLECTOR: BLACK
	ER7929WB	TRIM: WHITE REFLECTOR: BLACK
	ER7929WS	TRIM: WHITE REFLECTOR: SILVER
	ER7929BRC	TRIM: BLACK REFLECTOR: RED COPPER
	ER7929WW	TRIM: WHITE REFLECTOR: WHITE
	ER7929WBC	TRIM: WHITE REFLECTOR: BLACK CHROME
	ER7929BBC	TRIM: BLACK REFLECTOR: BLACK CHROME

SIZE : 11.5" X 11.5"

EAGLE MODULE


DIE CAST ALUMINIUM

OPTIMUM HEAT SINK DESIGN


MULTIPLE OUTER RING OPTIONS

MODULAR DESIGN





9W

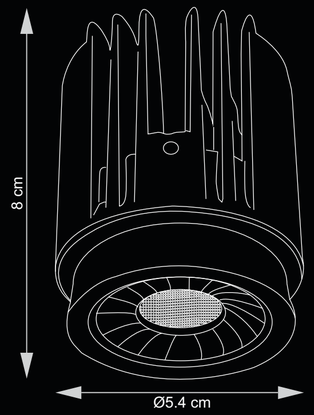

15W

EAGLE LED MODULE

DESCRIPTION

Recessed LED Module: To be used along With Ivex / Eagle rings

Modular design, option for Fixed, tiltable and trim or Trimless application

Compact, aesthetic and sleek design

Easy to mount on P.O.P Ceilings

MATERIAL OF CONSTRUCTION

Die Cast aluminum housing.

TECHNICAL INFORMATION

Wattage: 9W & 15W

CRI: ≥80, For Better Light Quality

SDCM: ≤5, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,


Life: ≥30,000 burning hours


Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA


Residences | Hotels | Modern Work Spaces | Showrooms


LUMINOUS INTENSITY DISTRIBUTION CURVE

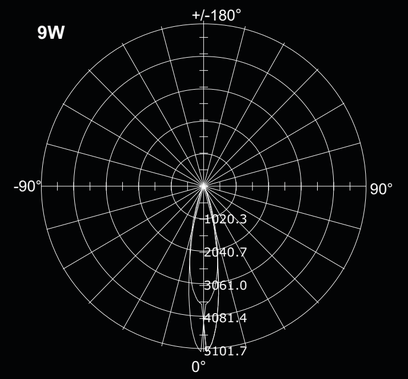

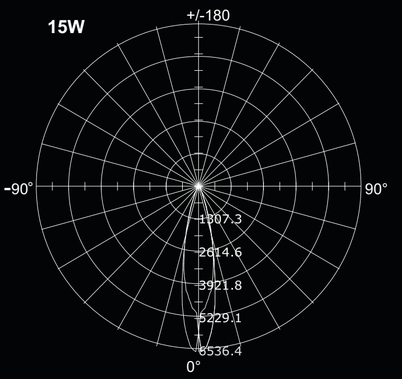

AVERAGE ILLUMINANCE AT A DISTANCE

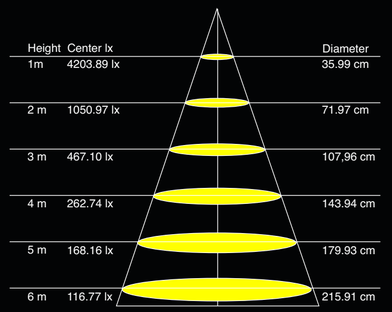

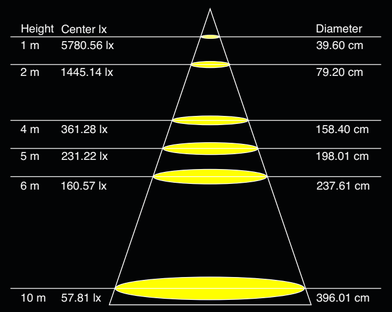

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	INPUT VOLTAGE (AC)	BEAM ANGLE
DL09112116	9W	3000K	A - Ø5.0 | C - 6.7	900	220 V AC- 240 V AC	24°
DL09312116	9W	4000K	A - Ø5.0 | C - 6.7	940	220 V AC- 240 V AC	24°
DL09612116	9W	6500K	A - Ø5.0 | C - 6.7	980	220 V AC- 240 V AC	24°
DL15112116	15W	3000K	A - Ø5.4 | C - 8.0	1500	220 V AC- 240 V AC	24°
DL15312116	15W	4000K	A - Ø5.4 | C - 8.0	1570	220 V AC- 240 V AC	24°
DL15612116	15W	6500K	A - Ø5.4 | C - 8.0	1620	220 V AC- 240 V AC	24°

Dimensions: A- LHW/Diameter | C- Height

EAGLE PRO

DIE CAST ALUMINIUM

OPTIMUM HEAT SINK DESIGN

MULTIPLE OUTER RING OPTIONS


MODULAR DESIGN

9W




15W





9W



15W

EAGLE PRO

DESCRIPTION

Recessed downlighter LED module,
To be used with ivex / eagle rings

Modular design, option for Fixed, tiltable and variety of Colour combination of trim and Trimless application

Compact, aesthetic and sleek design

Easy to mount on p.o.p Ceilings

MATERIAL OF CONSTRUCTION

Die Cast aluminum housing.

TECHNICAL INFORMATION

Wattage: 9W & 15W

CRI: ≥80, For Better Light Quality

SDCM: ≤3, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours


Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Residences | Hotels | Modern Work Spaces | Showrooms


LED MODULE


LUMINOUS INTENSITY DISTRIBUTION CURVE

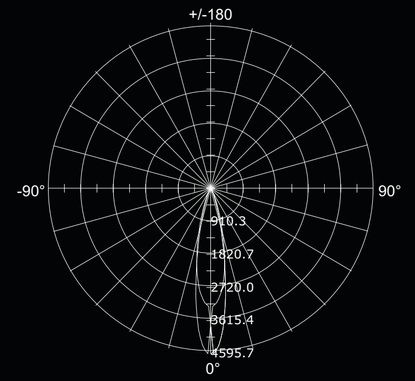

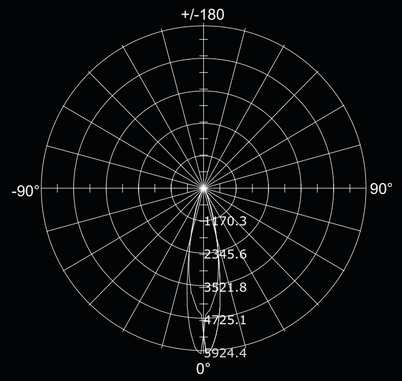

AVERAGE ILLUMINANCE AT A DISTANCE

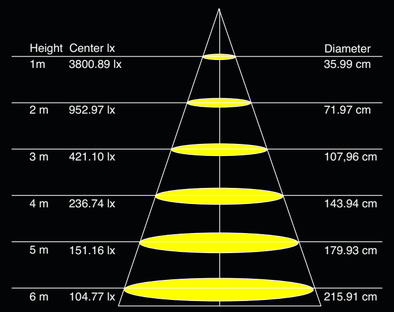

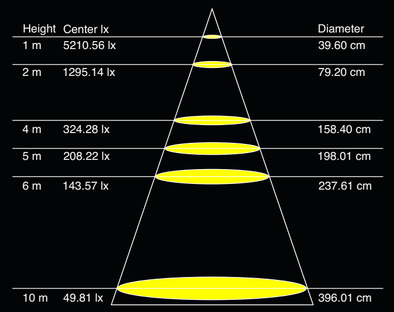

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	INPUT VOLTAGE (AC)	BEAM ANGLE
DL9W38D3KN	9W	3000K	A - Ø5.3 | C - 7.5	800 lm	220 V AC- 240 V AC	38°
DL9W38D4KN	9W	4000K	A - Ø5.3 | C - 7.5	840 lm	220 V AC- 240 V AC	38°
DL15W383KN	15W	3000K	A - Ø5.3 | C - 7.5	1350 lm	220 V AC- 240 V AC	38°
DL15W384KN	15W	4000K	A - Ø5.3 | C - 7.5	1410 lm	220 V AC- 240 V AC	38°

Dimensions: A- LHW/Diameter | C- Height



TRACK
LIGHTING SYSTEM

CALANTE PRO SYSTEM | AXIOS SYSTEM

SIZE : 11.5" X 11.5"

LINEAR-FROSTED

MAGNETIC TRACK MOUNTED


DIE CAST / EXTRUDED ALUMINIUM

SNAP FIT


UBER MODERN & SLEEK DESIGN

10 W




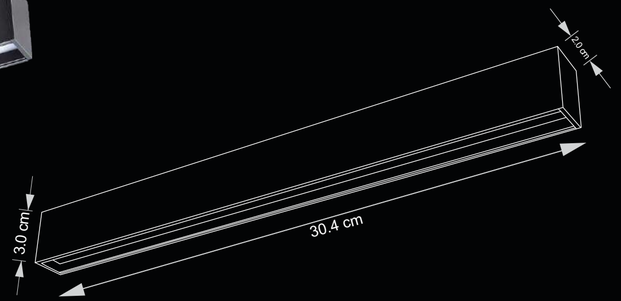

LUMINOUS INTENSITY DISTRIBUTION CURVE

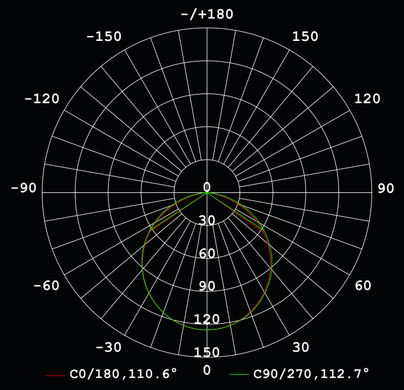

AVERAGE ILLUMINANCE AT A DISTANCE

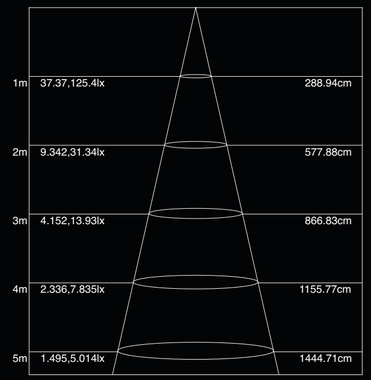

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
TKL1029	10W	3000K	L - 30.4 | W - 2.0 | H - 3.0	400	≥80	20	24 V DC	110°
TKL1039	10W	4000K	L - 30.4 | W - 2.0 | H - 3.0	445	≥80	20	24 V DC	110°

Dimensions: L - Length | W - Width | H - Height

CALANTE PRO

DESCRIPTION

Magnetic Track System.
Ideal to create that sleek and contemporary look.

Linear fixtures with options of frosted linear and Linear COB to match your taste and application.

Achieve the desired uber modern interiors with combination of fixtures from the *Calante Pro.*

MATERIAL OF CONSTRUCTION

Powder Coated Die-Cast / Extruded Aluminium

TECHNICAL INFORMATION

Wattage:
Linear Frosted- 10W
Linear COB- 6W

CRI: ≥80, For Better Light Quality

SDCM: ≤4, ensures better colour consistency

Input Voltage: 24 V DC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA


Residences | Art Galleries | Retail | Museums | Modern Offices

LINEAR-COB


MAGNETIC TRACK LIGHTS
SIGNATURE SERIES

6 W




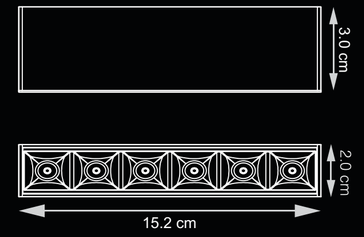

LUMINOUS INTENSITY DISTRIBUTION CURVE

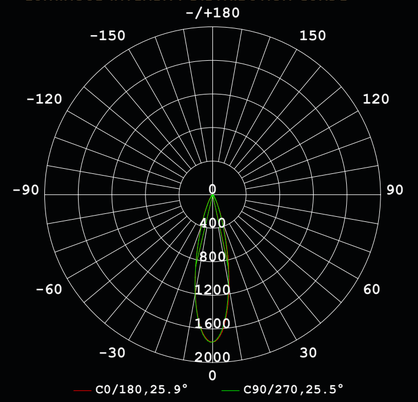

AVERAGE ILLUMINANCE AT A DISTANCE

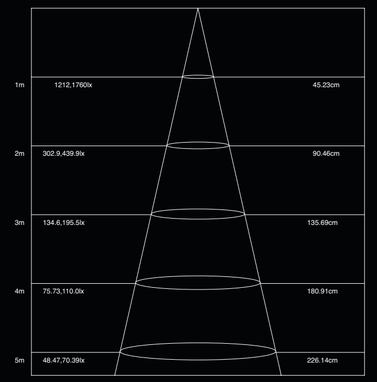

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
TKL6291	6W	3000K	L - 15.2 | W - 2.0 | H - 3.0	420	≥80	20	24 V DC	25°
TKL6391	6W	4000K	L - 15.2 | W - 2.0 | H - 3.0	450	≥80	20	24 V DC	25°

Dimensions: L - Length | W - Width | H - Height

SPOTLIGHT


MAGNETIC TRACK MOUNTED

SNAP FIT


UBER MODERN & SLEEK DESIGN

10 W






LUMINOUS INTENSITY DISTRIBUTION CURVE

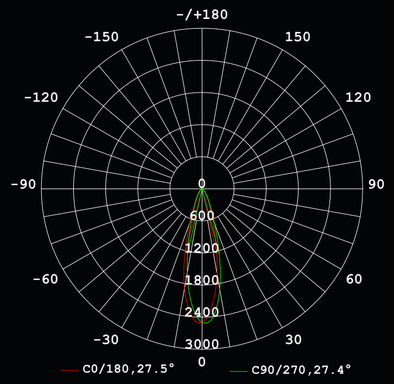

AVERAGE ILLUMINANCE AT A DISTANCE

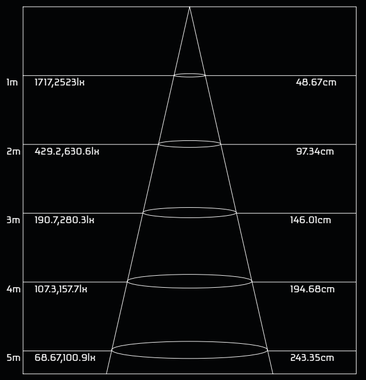

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
TKL10293	10W	3000K	D - 4.6 | W - 14.8	700	≥80	20	24 V DC	25°
TKL10393	10W	4000K	D - 4.6 | W - 14.8	700	≥80	20	24 V DC	25°

Dimensions: D- Diameter | W - Width

CALANTE PRO

DESCRIPTION

Magnetic Track System.
Ideal to create that sleek and contemporary look.

Track Mountable Spot Light with unique snap fit design. Swivel design ensures flexibility in directing light to the desired surfaces/objects.

Pendant : Track mountable. Sleek design for the contemporary look.

MATERIAL OF CONSTRUCTION

Powder Coated Die-Cast / Extruded Aluminium

TECHNICAL INFORMATION

Wattage:
Spot Light- 10W
Pendant- 6W

CRI: ≥80, For Better Light Quality

SDCM: ≤4, ensures better colour consistency

Input Voltage: 24 V DC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options


APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices


PENDANT

MAGNETIC TRACK LIGHTS
SIGNATURE SERIES


6 W

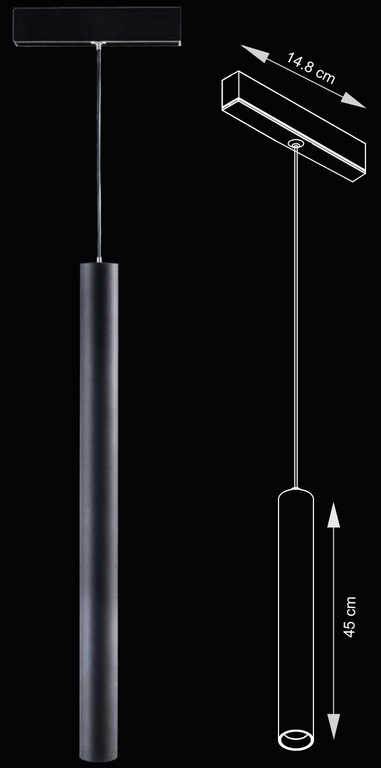

LUMINOUS INTENSITY DISTRIBUTION CURVE

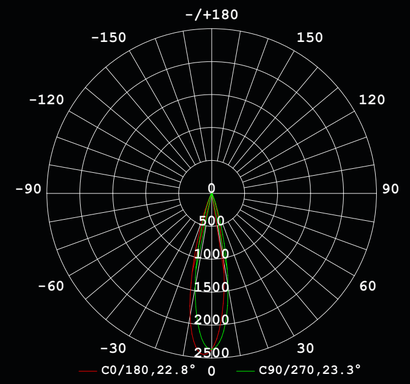

AVERAGE ILLUMINANCE AT A DISTANCE

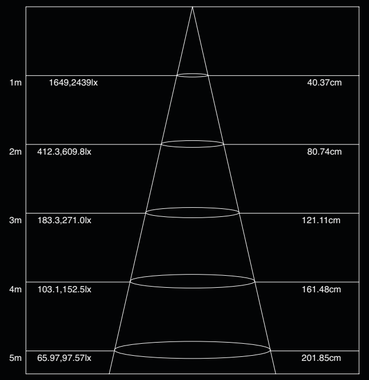

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
TKL6295	6W	3000K	D - 3.5 | W - 14.8	400	≥80	20	24 V DC	25°
TKL6395	6W	4000K	D - 3.5 | W - 14.8	400	≥80	20	24 V DC	25°

Dimensions: D- Diameter | W - Width

LINEAR COB TILTABLE


MAGNETIC TRACK MOUNTED

SNAP FIT


UBER MODERN & SLEEK DESIGN

6 W




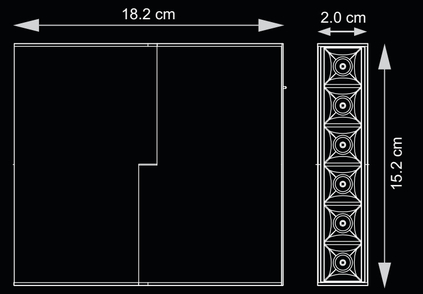

LUMINOUS INTENSITY DISTRIBUTION CURVE

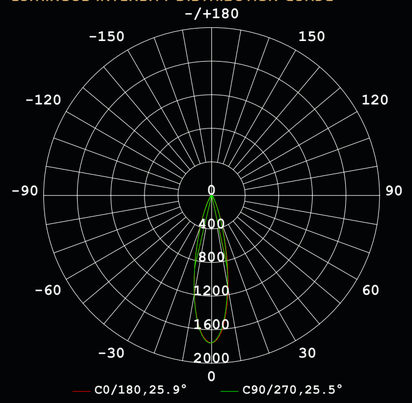

AVERAGE ILLUMINANCE AT A DISTANCE

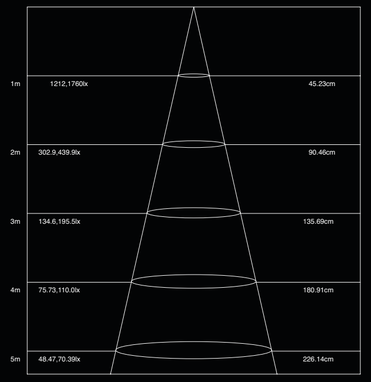

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
TA629AD	6W	3000K	L - 15.2 cm | W - 2 cm | H - 18.2 cm	450 LM	≥80	20	24 V DC	25°

Dimensions: D- Diameter | W - Width

CALANTE PRO

DESCRIPTION

Magnetic Track System.
Ideal to create that sleek and contemporary look.

Linear fixtures with options of frosted linear and Linear COB to match your taste and application.

Achieve the desired uber modern interiors with combination of fixtures from the *Calante Pro.*

MATERIAL OF CONSTRUCTION

Powder Coated Die-Cast / Extruded Aluminium

TECHNICAL INFORMATION

Wattage:
Linear COB Tiltable- 6W

Frosted Linear Tiltable- 10W

CRI: ≥80, For Better Light Quality

SDCM: ≤4, ensures better colour consistency

Input Voltage: 24 V DC

Surge Protection: ≥2.5KV

IP Rating: IP 20

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA


Residences | Art Galleries | Retail | Museums | Modern Offices

FROSTED LINEAR TILTABLE


MAGNETIC TRACK LIGHTS
SIGNATURE SERIES

10 W






LUMINOUS INTENSITY DISTRIBUTION CURVE

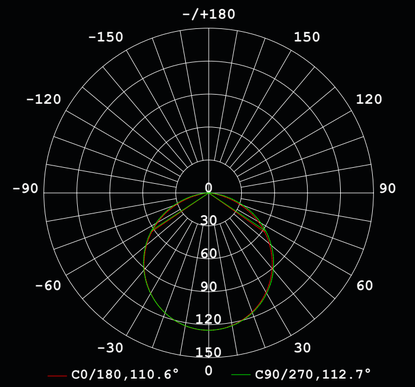


AVERAGE ILLUMINANCE AT A DISTANCE

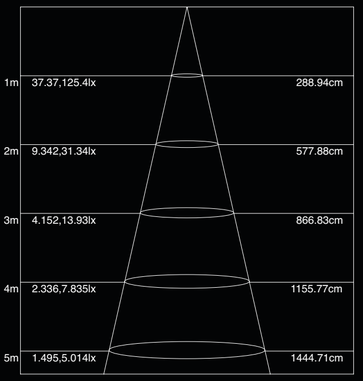


ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	INPUT VOLTAGE	BEAM ANGLE
TA10W3K	10W	3000K	L - 32.3 cm | W - 2 cm | H - 18.1 cm	360	≥80	20	24VDC	25°

Dimensions: D- Diameter | W - Width








L CONNECTOR INNER


ITEM CODE : MGLCI2519






RECESS ACCESSORY

ITEM CODE : MGRA25149






L CONNECTOR OUTER

ITEM CODE : MGLCO2519






L CONNECTOR 90 VERTICAL

ITEM CODE : MGLCV2519






TRACK POWER CONDUCTOR

ITEM CODE : MG25149C

CALANTE PRO
ACCESORIES

MAGNETIC TRACK LIGHTS
SIGNATURE SERIES




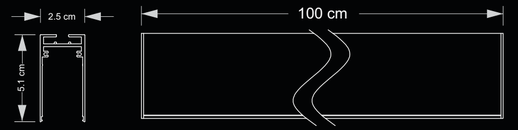

MAGNETIC TRACK

ITEM CODE : MG25149
DIMENSION : L 100 cm X W 2.5 cm X H 5.1 cm






PENDANT ACCESSORY

ITEM CODE : MGSP25149





TRACK CONNECTOR

ITEM CODE : MGCN25149

MOUNTING BOX

MOUNTING BOX
ITEM CODE : MGPTB2519

LED DRIVER

LED DRIVER
ITEM CODE : APT10024

AXIOS
TRACK LIGHT


METAL CORE PCB FOR BETTER HEAT DISSIPATION

POWDER COATED ALUMINIUM

SOFT LIGHT OUTPUT FOR EYE COMFORT

MODERN & SLEEK DESIGN



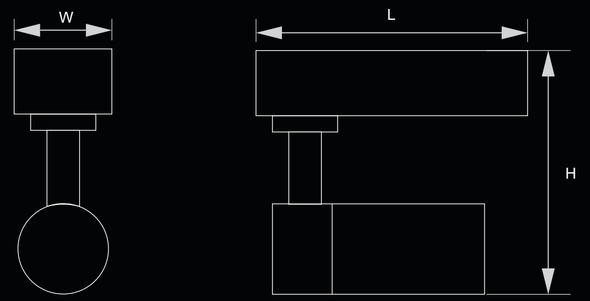

ITEM CODE	WATTAGE	BODY COLOUR	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
TKL1002	10W	WHITE	3000K	L- 12.5 | W- 5.0 | H- 17.2	640 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL1003	10W	WHITE	4000K	L- 12.5 | W- 5.0 | H- 17.2	680 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL1006	10W	WHITE	6500K	L- 12.5 | W- 5.0 | H- 17.2	800 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL2002	20W	WHITE	3000K	L- 14.5 | W- 6.0 | H- 20.0	1280 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL2003	20W	WHITE	4000K	L- 14.5 | W- 6.0 | H- 20.0	1380 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL2006	20W	WHITE	6500K	L- 14.5 | W- 6.0 | H- 20.0	1600 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL3002	30W	WHITE	3000K	L- 18.0 | W- 8.0 | H- 21.0	1920 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL3003	30W	WHITE	4000K	L- 18.0 | W- 8.0 | H- 21.0	2070 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL3006	30W	WHITE	6500K	L- 18.0 | W- 8.0 | H- 21.0	2400 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL1092	10W	BLACK	3000K	L- 12.5 | W- 5.0 | H- 17.2	640 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL1093	10W	BLACK	4000K	L- 12.5 | W- 5.0 | H- 17.2	680 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL2092	20W	BLACK	3000K	L- 14.5 | W- 6.0 | H- 20.0	1280 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL2093	20W	BLACK	4000K	L- 14.5 | W- 6.0 | H- 20.0	1380 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL3092	30W	BLACK	3000K	L- 18.0 | W- 8.0 | H- 21.0	1920 LM	>80	20	2.5	220 V AC - 240 V AC	24°
TKL3093	30W	BLACK	4000K	L- 18.0 | W- 8.0 | H- 21.0	2070 LM	>80	20	2.5	220 V AC - 240 V AC	24°

Dimensions: L - Length | W - Width | H - Height

AXIOS TRACK LIGHT

DESCRIPTION

Track Lighting System.
Ideal to create that sleek and contemporary look.

Track Mountable Spot Light with unique snap fit design. Swivel design ensures flexibility in directing light to the desired surfaces/objects.

MATERIAL OF CONSTRUCTION

Powder Coated Aluminium

TECHNICAL INFORMATION

Wattage: 10W, 20W & 30W

CRI: ≥70, For Better Light Quality

SDCM: ≤5, ensures better colour consistency

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices

AXIOS TRACK

TRACK SYSTEM

	ITEM CODE	COLOUR	DESCRIPTION
	TK1M2WR11	WHITE	1 M TRACK
	TK1M2WR09	BLACK	1 M TRACK
	TK2M2WR11	WHITE	2 M TRACK
	TK2M2WR09	BLACK	2 M TRACK

SIZE : 11.5" X 11.5"



SIZE : 11.5" X 11.5"

LED PANELS

VITO | EZIO RECESSED | EZIO SURFACE | VIVRE | VERTOS | VERTOS

VITO

Vito: Deep Recessed Panel

Vivre: Recessed & Surface application

Vivre: Tunable Option available

MODERN & SLEEK DESIGN

7.5 W




15 W



20 W



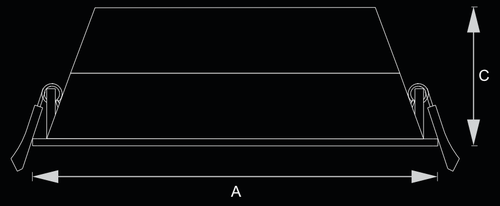

DIMENSIONAL DETAILS

	7.5 W	15 W	20 W
A	7.8 cm	10.3 cm	15.3 cm
C	5.5 cm	5.8 cm	5.8 cm

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (kV)	BEAM ANGLE
DLP802241	7.5 W	3000K	A - Ø7.8 | B - Ø7.2 | C - 5.5	510	≥ 80	20	2.5	90°
DLP803241	7.5 W	4000K	A - Ø7.8 | B - Ø7.2 | C - 5.5	535	≥ 80	20	2.5	90°
DLP806241	7.5 W	6500K	A - Ø7.8 | B - Ø7.2 | C - 5.5	565	≥ 80	20	2.5	90°
DLP15W3K11	15 W	3000K	A - Ø10.3 | B - Ø9.8 | C - 5.8	1065	≥ 80	20	2.5	90°
DLP15W4K11	15 W	4000K	A - Ø10.3 | B - Ø9.8 | C - 5.8	1115	≥ 80	20	2.5	90°
DLP15W6511	15 W	6500K	A - Ø10.3 | B - Ø9.8 | C - 5.8	1170	≥ 80	20	2.5	90°
DLP20W3K11	20 W	3000K	A - Ø15.3 | B - Ø14.3 | C - 5.8	1450	≥ 80	20	2.5	100°
DLP20W4K11	20 W	4000K	A - Ø15.3 | B - Ø14.3 | C - 5.8	1520	≥ 80	20	2.5	100°
DLP20W6511	20 W	6500K	A - Ø15.3 | B - Ø14.3 | C - 5.8	1570	≥ 80	20	2.5	100°

Dimensions: A- Diameter | B- Cut Out Size | C- Height

DESCRIPTION

Vito: Recessed Mounted Round Downlighters.Unique combination of high output and low glare.

Smooth design gels perfectly with clean ceiling to get a sophisticated and contemporary look.

Excellent colour consistency throughout the installation

Vivre: Offers “Switch Tunability” and an unique design that enables various mounting options - Recessed, Surface, Junction Box Mounted, within the same product

MATERIAL OF CONSTRUCTION

Vito: Powder Coated Aluminium
Vivre: Polycarbonate

TECHNICAL INFORMATION

Wattage:
Vito: 7.5W, 15W & 20W
Vivre: 6W & 12W

CRI: ≥80, For Better Light Quality

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours


Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices


VIVRE
6 IN 1 TUNABLE



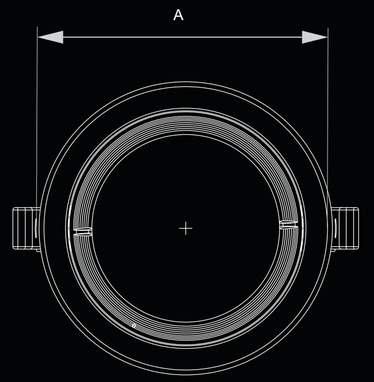

DIMENSIONAL DETAILS

	6 W	12 W
A	12 cm	17 cm
C	3.2 cm	3.2 cm



ITEM CODE	WATTAGE	CCT / TUNABILITY	DIMENSIONS (in cms)	CRI	IP RATING	LUMENS	SURGE RATING (kV)	BEAM ANGLE
TNP061921	6 W	SWITCH TUNABLE 3000 K / 4000 K / 6000 K	A - Ø12 | B - Ø10.5 | C - 3.76	>80	20	400 / 410 / 420	2.5	110°
TNP121922	12 W	SWITCH TUNABLE 3000 K / 4000 K / 6000 K	A - Ø17 | B - Ø15.5 | C - 3.19	>80	20	1000 / 1050 / 1090	2.5	110°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

SIZE : 11.5" X 11.5"

EZIO
RECESSED ROUND


METAL CORE PCB FOR BETTER HEAT DISSIPATION

DIE CAST POLYDER COATED ALUMINIUM HOUSING

SOFT LIGHT OUTPUT FOR EYE COMFORT

MODERN & SLEEK DESIGN







DIMENSIONAL DETAILS

	8 W	12 W & 15W	18 W
A	11.2 cm	16 cm	21.2 cm
C	3 cm	3 cm	3 cm

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DLP081123M	8W	3000K	A- Ø11.2 | B- Ø10.0 | C- 3.0	560	>80	20	2.5	220 V AC - 240 V AC	120°
DLP081323M	8W	4000K	A- Ø11.2 | B- Ø10.0 | C- 3.0	573	>80	20	2.5	220 V AC - 240 V AC	120°
DLP081623M	8W	6500K	A- Ø11.2 | B- Ø10.0 | C- 3.0	522	>80	20	2.5	220 V AC - 240 V AC	120°
DLP121123M	12W	3000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	918	>80	20	2.5	220 V AC - 240 V AC	120°
DLP121323M	12W	4000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	944	>80	20	2.5	220 V AC - 240 V AC	120°
DLP121623M	12W	6500K	A- Ø16.0 | B- Ø14.8 | C- 3.0	975	>80	20	2.5	220 V AC - 240 V AC	120°
DLP151123M	15W	3000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	1176	>80	20	2.5	220 V AC - 240 V AC	120°
DLP151323M	15W	4000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	1220	>80	20	2.5	220 V AC - 240 V AC	120°
DLP151623M	15W	6500K	A- Ø16.0 | B- Ø14.8 | C- 3.0	1682	>80	20	2.5	220 V AC - 240 V AC	120°
DLP181123M	18W	3000K	A- Ø21.2 | B- Ø20.0 | C- 3.0	1402	>80	20	2.5	220 V AC - 240 V AC	120°
DLP181323M	18W	4000K	A- Ø21.2 | B- Ø20.0 | C- 3.0	1477	>80	20	2.5	220 V AC - 240 V AC	120°
DLP181623M	18W	6500K	A- Ø21.2 | B- Ø20.0 | C- 3.0	1534	>80	20	2.5	220 V AC - 240 V AC	120°

Dimensions: A- Diameter | B- Cut Out Size | C- Height

LED PANELS RECESSED

DESCRIPTION

Slim Recessed Panels in Round and Square Shape.

Slim design compliments sophisticated and contemporary look

Metal Core PCB and Aluminium Die Cast housing ensures better heat dissipation, thus longer life and better light output over a period of time.

Wide range of wattages to suit variety of spaces

MATERIAL OF CONSTRUCTION

Pressure Die Cast and Powder Coated Aluminium

TECHNICAL INFORMATION

Wattage: 8W, 12W, 15W & 18W

CRI: ≥80, For Better Light Quality

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours


Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices

EZIO
RECESSED SQUARE





DIMENSIONAL DETAILS

	8 W	12 W & 15W	18 W
A	11.2 cm	16 cm	21.2 cm
C	3 cm	3 cm	3 cm

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DLP081143M	8W	3000K	A- Ø11.2 | B- Ø10.0 | C- 3.0	581	>80	20	2.5	220 V AC - 240 V AC	120°
DLP081343M	8W	4000K	A- Ø11.2 | B- Ø10.0 | C- 3.0	564	>80	20	2.5	220 V AC - 240 V AC	120°
DLP081643M	8W	6500K	A- Ø11.2 | B- Ø10.0 | C- 3.0	571	>80	20	2.5	220 V AC - 240 V AC	120°
DLP121143M	12W	3000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	868	>80	20	2.5	220 V AC - 240 V AC	120°
DLP121343M	12W	4000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	955	>80	20	2.5	220 V AC - 240 V AC	120°
DLP121643M	12W	6500K	A- Ø16.0 | B- Ø14.8 | C- 3.0	969	>80	20	2.5	220 V AC - 240 V AC	120°
DLP151143M	15W	3000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	1132	>80	20	2.5	220 V AC - 240 V AC	120°
DLP151343M	15W	4000K	A- Ø16.0 | B- Ø14.8 | C- 3.0	1293	>80	20	2.5	220 V AC - 240 V AC	120°
DLP151643M	15W	6500K	A- Ø16.0 | B- Ø14.8 | C- 3.0	1201	>80	20	2.5	220 V AC - 240 V AC	120°
DLP181143M	18W	3000K	A- Ø21.2 | B- Ø20.0 | C- 3.0	1374	>80	20	2.5	220 V AC - 240 V AC	120°
DLP181343M	18W	4000K	A- Ø21.2 | B- Ø20.0 | C- 3.0	1373	>80	20	2.5	220 V AC - 240 V AC	120°
DLP181643M	18W	6500K	A- Ø21.2 | B- Ø20.0 | C- 3.0	1598	>80	20	2.5	220 V AC - 240 V AC	120°

Dimensions: A- LKW/Diameter | B- Cut Out Size | C- Height

SIZE : 11.5" X 11.5"

EZIO
SURFACE ROUND

METAL CORE PCB FOR BETTER HEAT DISSIPATION

DIE CAST POWDER COATED ALUMINIUM HOUSING


SOFT LIGHT OUTPUT FOR EYE COMFORT

MODERN & SLEEK DESIGN











DIMENSIONAL DETAILS

	8 W	12 W & 15W	18 W
A	11.2 cm	16 cm	21.2 cm
C	3 cm	3 cm	3 cm

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DLP082123M	8W	3000K	A- Ø11.2 | C- 3.0	557	>80	20	2.5	220 V AC - 240 V AC	120°
DLP082323M	8W	4000K	A- Ø11.2 | C- 3.0	561	>80	20	2.5	220 V AC - 240 V AC	120°
DLP082623M	8W	6500K	A- Ø11.2 | C- 3.0	539	>80	20	2.5	220 V AC - 240 V AC	120°
DLP122123M	12W	3000K	A- Ø16.0 | C- 3.0	870	>80	20	2.5	220 V AC - 240 V AC	120°
DLP122323M	12W	4000K	A- Ø16.0 | C- 3.0	951	>80	20	2.5	220 V AC - 240 V AC	120°
DLP122623M	12W	6500K	A- Ø16.0 | C- 3.0	1000	>80	20	2.5	220 V AC - 240 V AC	120°
DLP152123M	15W	3000K	A- Ø16.0 | C- 3.0	1152	>80	20	2.5	220 V AC - 240 V AC	120°
DLP152323M	15W	4000K	A- Ø16.0 | C- 3.0	1201	>80	20	2.5	220 V AC - 240 V AC	120°
DLP152623M	15W	6500K	A- Ø16.0 | C- 3.0	1234	>80	20	2.5	220 V AC - 240 V AC	120°
DLP182123M	18W	3000K	A- Ø21.2 | C- 3.0	1404	>80	20	2.5	220 V AC - 240 V AC	120°
DLP182323M	18W	4000K	A- Ø21.2 | C- 3.0	1446	>80	20	2.5	220 V AC - 240 V AC	120°
DLP182623M	18W	6500K	A- Ø21.2 | C- 3.0	1572	>80	20	2.5	220 V AC - 240 V AC	120°

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

LED PANELS SURFACE

DESCRIPTION

Slim Surface Panels in Round and Square Shape.

Slim design compliments sophisticated and contemporary look

Metal Core PCB and Aluminium Die Cast housing ensures better heat dissipation, thus longer life and better light output over a period of time.

Wide range of wattages to suit variety of spaces

MATERIAL OF CONSTRUCTION

Pressure Die Cats and Powder Coated Aluminium

TECHNICAL INFORMATION

Wattage: 8W, 12W, 15W & 18W

CRI: ≥80, For Better Light Quality

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA


Residences | Art Galleries | Retail | Museums | Modern Offices

EZIO
SURFACE SQUARE









DIMENSIONAL DETAILS

	8 W	12 W & 15W	18 W
A	11.2 cm	16 cm	21.2 cm
C	3 cm	3 cm	3 cm

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DLP082143M	8W	3000K	A- Ø11.2 | C- 3.0	564	>80	20	2.5	220 V AC - 240 V AC	120°
DLP082343M	8W	4000K	A- Ø11.2 | C- 3.0	556	>80	20	2.5	220 V AC - 240 V AC	120°
DLP082643M	8W	6500K	A- Ø11.2 | C- 3.0	543	>80	20	2.5	220 V AC - 240 V AC	120°
DLP122143M	12W	3000K	A- Ø16.0 | C- 3.0	912	>80	20	2.5	220 V AC - 240 V AC	120°
DLP122343M	12W	4000K	A- Ø16.0 | C- 3.0	991	>80	20	2.5	220 V AC - 240 V AC	120°
DLP122643M	12W	6500K	A- Ø16.0 | C- 3.0	981	>80	20	2.5	220 V AC - 240 V AC	120°
DLP152143M	15W	3000K	A- Ø16.0 | C- 3.0	1162	>80	20	2.5	220 V AC - 240 V AC	120°
DLP152343M	15W	4000K	A- Ø16.0 | C- 3.0	1308	>80	20	2.5	220 V AC - 240 V AC	120°
DLP152643M	15W	6500K	A- Ø16.0 | C- 3.0	1171	>80	20	2.5	220 V AC - 240 V AC	120°
DLP182143M	18W	3000K	A- Ø21.2 | C- 3.0	1355	>80	20	2.5	220 V AC - 240 V AC	120°
DLP182343M	18W	4000K	A- Ø21.2 | C- 3.0	1426	>80	20	2.5	220 V AC - 240 V AC	120°
DLP182643M	18W	6500K	A- Ø21.2 | C- 3.0	1634	>80	20	2.5	220 V AC - 240 V AC	120°


Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

VERTOS

SOFT LIGHT OUTPUT FOR EYE COMFORT

MODERN & SLEEK DESIGN



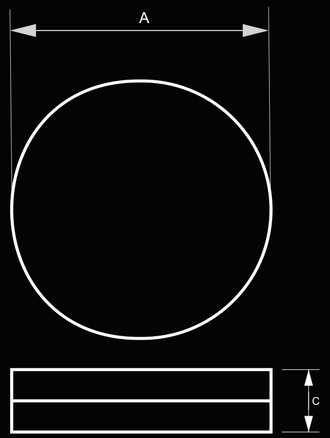

DIMENSIONAL DETAILS

	6 W	12 W	18 W	24 W
A	9.0 cm	12.0 cm	15.5 cm	19.0cm
C	2.7 cm	2.7 cm	2.7 cm	2.7cm

ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)	BEAM ANGLE
DLP616411	6W	6500K	A - Ø9.0 | C - 2.7	500	>80	20	2.5	220 V AC - 240 V AC	120°
DLP126114	12W	6500K	A - Ø12.0 | C - 2.7	1000	>80	20	2.5	220 V AC - 240 V AC	120°
DLP186114	18W	6500K	A - Ø15.5 | C - 2.7	1500	>80	20	2.5	220 V AC - 240 V AC	120°
DLP246114	24W	6500K	A - Ø19.0 | C - 2.7	1900	>80	20	2.5	220 V AC - 240 V AC	120°

Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

LED PANELS

DESCRIPTION

Surface Mounted Round Downlighters. Unique combination of high output and low glare.

Slim design gels perfectly with clean ceiling to get a sophisticated and contemporary look.

Excellent colour consistency throughout the installation

MATERIAL OF CONSTRUCTION

Polycarbonate

TECHNICAL INFORMATION

Wattage: 8W, 12W, 18W & 24W

CRI: ≥80, For Better Light Quality

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,

Life: ≥30,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices

LED PANELS



Dimensions: A- LHW/Diameter | B- Cut Out Size | C- Height

COMMERCIAL PANELS

Increase workspace effciency and productivity with Tisva commercial panels. These lights fit smoothly with most standard ceiling grids, are energy effcient and low on maintenance costs.



ASTER PRO

DESCRIPTION

Recessed mounted 2X2 panels suitable for almost all standard grid ceilings.

Unique combination of high output and very low glare.

Sleek design with special diffuser to ensure a soothing lighting effect

Excellent colour consistency throughout the installation

MATERIAL OF CONSTRUCTION

Aluminium CRCA

TECHNICAL INFORMATION

Wattage: 36W

CRI: ≥80, For Better Light Quality

Input Voltage: 220 V AC - 240 V AC

Surge Protection: ≥2.5KV

IP Rating: IP 20,


Life: ≥25,000 burning hours

Dimmability: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices

COMMERCIAL 2 X 2 PANELS

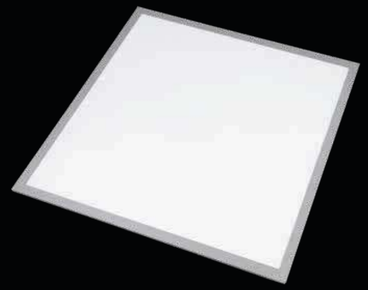



ITEM CODE	WATTAGE	CCT	DIMENSIONS (in cms)	LUMENS	CRI	IP RATING	SURGE RATING (KV)	INPUT VOLTAGE (AC)
BP361325D	36W	4000K	L - 59.5 | W - 59.5 | H - 3.0	3780	80	20	3.5	220 V AC - 240 V AC
BP361625D	36W	6500K	A - 59.5 | B - 59.5 | C - 3.0	3950	80	20	3.5	220 V AC - 240 V AC

Dimensions: L - Length | W - Width | H - Height

SIZE : 11.5" X 11.5"



LED STRIPS

LUME SERIES - INDOOR | LUME SERIES - OUTDOOR | LUME SERIES - RGBWW | LUME SERIES - ROPE LIGHT

SIZE : 11.5" X 11.5"

LUME SERIES
LED STRIP LIGHT





IP 20 - FOR INDOOR APPLICATION

ITEM CODE	DESCRIPTION	WATTAGE	CCT	LENGTH	IP RATING	INPUT VOLTAGE (DC)
LSH20Y0505R	FLEXIBLE LED STRIP	5W/M	3000K	5 m	20	12 V DC
LSH20N0505R	FLEXIBLE LED STRIP	5W/M	4000K	5 m	20	12 V DC
LSH20W0505R	FLEXIBLE LED STRIP	5W/M	6500K	5 m	20	12 V DC
LSH20Y10554	FLEXIBLE LED STRIP	10W/M	3000K	5 m	20	12 V DC
LSH20N10554	FLEXIBLE LED STRIP	10W/M	4000K	5 m	20	12 V DC
LSH20W10554	FLEXIBLE LED STRIP	10W/M	6500K	5 m	20	12 V DC
LSH20Y14554	FLEXIBLE LED STRIP	14.4W/M	3000K	5 m	20	12 V DC
LSH20N14554	FLEXIBLE LED STRIP	14.4W/M	4000K	5 m	20	12 V DC
LSH20W14554	FLEXIBLE LED STRIP	14.4W/M	6500K	5 m	20	12 V DC

IP 20 LED STRIP- RGB WW

ITEM CODE	DESCRIPTION	WATTAGE	CCT	LENGTH	IP RATING	INPUT VOLTAGE (DC)
LSH40245	FLEXIBLE LED STRIP	8 W/M	RGB WW	5 M	20	24 V DC
LSH2402C	RF CONTROLLER					
LSH240R	RECTIFIER KIT					

IP 65 - FOR OUTDOOR APPLICATION

ITEM CODE	DESCRIPTION	WATTAGE	CCT	LENGTH	IP RATING	INPUT VOLTAGE (DC)
LSH65Y10554	FLEXIBLE LED STRIP	10w/m	3000K	5 m	65	24 V DC
LSH65N10554	FLEXIBLE LED STRIP	10w/m	4000K	5 m	65	24 V DC
LSH65W10554	FLEXIBLE LED STRIP	10w/m	6500K	5 m	65	24 V DC
LSH65Y14554	FLEXIBLE LED STRIP	14.4w/m	3000K	5 m	65	24 V DC
LSH65N14554	FLEXIBLE LED STRIP	14.4w/m	4000K	5 m	65	24 V DC
LSH65W14554	FLEXIBLE LED STRIP	14.4w/m	6500K	5 m	65	24 V DC

LED STRIP & ROPE LIGHT

DESCRIPTION

Flexible LED Strips for Indoor and out door applications.
Options in Warm White, Natural White, Cool White and RGBWW colour options.

TECHNICAL INFORMATION

Wattage: 5W/m, 10W/m, 14.4W/m and 8W/m (RGBWW)

IP Rating: IP20 and IP65 versions available

Input Voltage: 24 V DC

Dimming option: On Request. Please get in touch with Tisva Team for Dimming Options

APPLICATION AREA

Residences | Art Galleries | Retail | Museums | Modern Offices | Etc for Cove Lighting and Out Door Application

LUME ROPE LIGHT



IP 65 - FOR OUTDOOR APPLICATION

ITEM CODE	DESCRIPTION	WATTAGE	CCT	LENGTH	IP RATING	INPUT VOLTAGE (DC)
LSH823K1	FLEXIBLE LED ROPE LIGHT	8W/M	3000K	50 m	65	24 V DC
LSH834KN	FLEXIBLE LED ROPE LIGHT	8W/M	4000K	50 m	65	24 V DC
A6003A240	RECTIFIER KIT					

LUME LED DRIVER

ITEM CODE	WATTAGE	DESCRIPTION
A225012CV	25 W DRIVER	12V NON DIMMABLE IP20
A23A24VP1	72 W DRIVER	24V NON DIMMABLE IP20
A962402CV	96 W DRIVER	24V DC IP20
A962406CV	96 W DRIVER	24V DC IP65

LED DRIVER

ITEM CODE	WATTAGE	DIMENSIONS*
ALDD1230	12W	A - 10.8*10.8 C - 2.4
ALDD1535	15W	A - 10.8*10.8 C - 2.4
ALDD1850	18W	A - 10.8*10.8 C - 2.4
ALDD3070	30W	A - 10.8*10.8 C - 2.8

Dimensions: A- LXW/Diameter | B- Cut Out Size | C- Height

SIZE : 11.5" X 11.5"



SIZE : 11.5" X 11.5"

LANDSCAPE LIGHTING

WALLLIGHT | BOLLARDS | POSTTOP | GATELIGHT

WALL LIGHTS




WALL LIGHT - LW12360054
WATT - 2 x 12W LED (IP54)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW62952
WATT - 2 x 3W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW6320054
WATT - 2 x 6W LED (IP54)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW06254
WATT - 1 x 6W LED (IP54)
LAMP BASE - INBUILT LED
CCT - 3000 K

LANDSCAPE LIGHTS

DESCRIPTION

Wide range of architectural landscape lights that include Wall Lights,
bollards, gate lights, post top etc

Designed and developed for outdoor applications.

Easy to install and maintain.

MATERIAL OF CONSTRUCTION

Die cast aluminium

APPLICATION AREA

Outdoor applications like gardens, lawns, pathways, feature walls, pillars, etc

WALL LIGHTS



WALL LIGHT - - LW18156
WATT - 3 x 6W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW12390054
WATT - 6 x 12W LED (IP54)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW124952
WATT - 4 x 3W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW12254
WATT - 12W LED (IP54)
LAMP BASE - INBUILT LED
CCT - 3000 K


WALL LIGHTS



WALL LIGHT - LCL20152
WATT - 2 x 10W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LGT121W1
WATT - 1 x 12W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW1215441
WATT - 4 x 3W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K




WALL LIGHT - LW90151
WATT - 3 x 3W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - - LW08254
WATT - 8W LED (IP54)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW09152
WATT - 2 x 4.5W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - - LW12152
WATT - 2 x 6W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



WALL LIGHT - LW81AS10
WATT - 1 x 8W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K


POST TOP



GATE LIGHT - LGT12151
WATT - 1 x 12W LED (IP65)
LAMP BASE - INBUILT LED



BOLLARD - LB155171
WATT - 1 x 15W LED (IP65)
LAMP BASE - INBUILT LED



BOLLARD - LB155131
WATT - 1 x 15W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



BOLLARD - LB155161
WATT - 1 x 15W LED (Ip65)
LAMP BASE - INBUILT LED
CCT - 3000 K



BOLLARD - LB155141
WATT - 1 x 15W LED (IP65)
LAMP BASE - INBUILT LED
CCT - 3000 K



POST TOP
WATT - 40W LED (IP65)
LAMP BASE - INBUILT LED

ITEM CODE	CCT
LPT40143	3000K
LPT40343	4000K
LPT40643	6500K
LPT40103	4000K

ROLL OF HONOUR
Some of the projects that we are proud to be a part of

INFRASTRUCTURE PROJECTS
1. Rashtrapati Bhavan
2. Lucknow Vidhansabha
3. Governor House, Bihar
4. Chief Minister House, New Delhi
5. Statue of Unity,Kevadia Gujrat
6. Onkareshwar Temple, Madhya Pradesh
7. Mahakaleshwar Temple, Ujjain
8. Karila Devi Temple, Madhya Pradesh
9. Iskon Temple,Rohini, Delhi
10. NDMC ED Office, New Delhi
11. Kashi Vishwanath Temple, Varanasi
12. GMR Goa International Airport, Mopa, Goa
13. Delhi Metro Oficers Residential, Okhla
14. NBCC Apartment Dwarka
15. Hindon Airforce Base, Ghaziabad

HOTELS
1. ITC Tauleen, Chail Himachal Pradesh
2. Holiday Inn, Manesar, Haryana
3. Sarovar Portico Gaur City, Noida
4. Courtyard by Mariott, Faridabad
5. Lemon Tree, Chennai
6. Lemon Tree, Bangalore
7. Lemon Tree, Goa
8. Lemon Tree, Pune
9. Lemon Tree, Kausambi
10. Radisson, Srinagar
11. Radisson, Rajbag
12. Radisson, Sonmarg
13. Radisson, Pahalgam
14. Dunsvirk Court Hotel, Mussorie
15. Taj, Amer
16. A.R.Hotel, Amritsar

COMMERCIAL & OFFICE
1. SBI Head Office, Delhi
2. SBI Branch, Okhla, Delhi
3. SBI Guest House
4. Concentrix, Gurgaon
5. Honda Factory, Manesar
6. Yash Jewellers, Amritsar
7. Home Ministry, Chief Secretary Office, New Delhi
8. PNB Connought Place, Delhi
9. Advent IT Park
10. SGS Technology
11. Policy Bazar
12. NTRI, Delhi
13. Kanha Ashram, Hyderabad

EDUCATIONAL INSTITUTIONS
1. IMT Ghaziabad
2. DAV Schools
3. Lotus Valley School, Greater Noida
4. Woodstock School, Mussorie
5. Gurukul, The School
6. Rishihood University
7. Delhi Public School, Noida, Sec 132
8. Greater Noida World School
9. Sriram Millenium School, Noida
10. Millenium School, Lucknow
11. Delhi Public School, Lucknow
12. Seth M. R. Jaipuria School, Lucknow
13. Guru Nanak School, Ranchi
14. PGDAV, Lajpat Nagar
15. DAV, Pahadganj, Delhi
16. Aryan World School, Pune
17. Hostel Block, Galgotia University

BUILDERS & DEVELOPERS
1. DLF Camelias
2. Central Park 2 & 3, Gurgaon
3. BPTP Faridabad
4. AIPL, Gurgaon
5. Wave Buider City, Noida
6. Anathraj, Gurgaon
7. M2K County, Dharuhera
8. M3M IFC, Gurgaon
9. Sushma Buidtech, Chandigarh
10. Shalimar One World, Lucknow
11. TDI, Faridabad
12. Prestige Falcon City, Bangalore
13. Lodha Belezza, Hyderabad

HOSPITALS
1. Amara Raja Hospital, Andhra Pradesh
2. Meenakshi Hospital, Andhra Pradesh
3. Fortis Cancer Institute, Delhi
4. Rainbow Children Hospital, Delhi
5. IVF Hospital, Hyderabad

.....AND MANY MORE

Disclaimer:
Due to continuous efforts in developing and improving products,
we reserve the rights to make changes in the design and data or withdraw the product without any prior notice.

Every effort has been made to ensure accuracy in compilation of technical detail within this publication.
However, customer is advised to check exact product details with the company before buying the product. We shall not be responsible for any loss arising out of any error in this catalogue.

All product and installation images are indicative only.

Disputes, if any, are subject to Delhi jurisdiction only

SIZE : 11.5" X 11.5"

USHA INTERNATIONAL LTD.
Plot No. 15, Institutional Area, Sector 32, Gurugram – 122001 Haryana (India)
Telephone: +91 124 4583100, Fax: +91 124 4583200
Website: www.lightsbytisva.com, E-mail: customer_care@lightsbytisva.com

https://www.facebook.com/TISVA

https://www.instagram.com/lightsbytisva/

SIZE : 11.5” X 11.5”